BRADY

i3300

LABEL PRINTER

Print any label or sign with the versatile BradyPrinter i3300 Industrial Label Printer

About BRADY

Once you have worked with BRADY, our name will stick with you, (just like our labels) because BRADY is one of the world's leading labelling and identification specialists.

Innovative

At BRADY we continue to improve. We have many customers from all industries, and we strive to be ahead of their needs by continuing to invest in research for even more performant solutions. By developing more user-friendly and efficient concepts, we give our thousands of customers the best in the market.

Strength

At BRADY, we believe our biggest strength is the wide range of identification and safety solutions we can offer our customers, whether it's labelling the smallest component or complete signage for an entire warehouse. We're also proud to offer many products and services - from printers, scanners and software to service contracts and on-site training - that compliment any identification job. And don't forget, our wide network of expert distributors can always offer you a tailor-made solution to meet your specific requirements.

Trust

For over a hundred years, BRADY has been connected with quality, trust and stability. We demand the best for your products and services, because we know, better than anyone, the importance of good and reliable identification. Identification looks like a small detail, but every professional knows that this kind of detail is crucial to any business.

Inform

We also have specialised dealers in your region, who can answer all your identification and labelling questions, specific to your activity. They will be happy to provide you with all kinds of options and solutions with no obligation.

Microsoft is a trademark of Microsoft Corporation, Bluetooth is a trademark of Bluetooth Sig, Inc., Android is a trademark of Google Inc.

BRC Listed NYSE THE NEW YORK STOCK EXCHANGE

Brady products are sold on the condition that the purchaser will test them in actual use and determine for himself/herself their suitability to his/her intended purpose. Brady warrants to the purchaser that Brady products are free from defects in material and workmanship but limits its obligation under this warranty to the replacement of the product which has been shown to Brady's satisfaction to have been defective at the time of its purchase.

The warranty does not extend to any persons who have acquired the product from the purchaser. It is in lieu of any other warranty, including every warranty of sale-ability, marketability or suitability for the intended purpose, and is also in lieu of any other obligation or liability on the part of Brady.

Under no circumstances will Brady be liable for losses, damage, costs or subsequent damage of whatever nature which may arise in connection with the use of, or inability to use, Brady's products.

Print any label or sign with the versatile BradyPrinter i3300 Industrial Label Printer

The Brady Advantage

When it comes to identification, safety and compliance, there's a clear advantage to working with Brady. We put our customers first in everything we do.
Our goal is to give you an unrivalled customer experience. We are relentlessly committed to performance and excellence - in our products, services and people.
Our products and solutions perform in ways that others simply can't match. Our people perform in ways that regularly exceed your expectations. And our focus and discipline work toward solid, long-term performance for our customers.
In short, Brady is the company you trust when performance matters most.

Learn more about the Brady Advantage at: www.bradyeurope.com

Table of contents

4	BradyPrinter i3300 introduction
5	BradyPrinter i3300 at a glance
6	BradyPrinter i3300 kits and accessories
7	Applications
9	Media offering
10	Ribbons
11	Facility & safety identification
20	Electrical / Automation identification
33	Product & general purpose identification
38	Electronics identification
41	Laboratory identification
49	Master material index
54	Software
55	BradyPrinter i3300 specifications

BradyPrinter i3300
Industrial Label Printer

Compatible labels & ribbons



Software for label creation
and data integration

Printer technical specifications

Print any label or sign with the versatile BradyPrinter i3300 Industrial Label Printer

The BradyPrinter i3300 Industrial Label Printer is a completely hassle free, easy to use PC-based printer. It can print a full range of safety and facility labels and signs as well as die cut labels for wire identification, product identification and laboratory identification.

Print a huge range of labels & signs

With the BradyPrinter i3300, you can print a huge range of reliable labels and signs at your location in monocolour. More than 50 different Brady label materials are compatible with the BradyPrinter i3300. Labels & signs that can be printed with the BradyPrinter i3300 include:

- wire & cable identification labels
- product and laboratory identification labels
- safety and facility signs

These can be used both in- and outdoor, and include specialty solutions like ToughWash labels and ToughStripe floor marking.

Designed to last

The BradyPrinter i3300 prints on Brady's industrial grade labels that have been designed to last in challenging conditions. All Brady labels have been tested in line with international ASTM test methods and a technical data sheet is available for every material.

Scan or click the QR code

Extremely easy to use

The BradyPrinter i3300 is extremely easy to use and features auto-calibration and automatic label material setup. This will enable you to immediately start printing the signs and labels you need. Switching to another label material is easy and extremely fast thanks to the printer's 'drop-in' label materials and matching ink ribbons that can be switched out in less than 20 seconds. When used with Brady Workstation apps, a wide variety of sign & label design options becomes available.

BradyPrinter i3300 top features

No wasting labels with print smart technology

Print on every label or sleeve – no more blank first label. With print smart technology, the printer, labels, ribbons and software all work together for efficient label setup. It's all in the smart chip embedded in Brady materials – it stores the material size, type, colour, quantity and compatibility, and sets proper burn settings, sensor alignment and print speed. When installed, the chip sends that information to the printer and desktop software and auto calibrates without wasting any labels – and you get fast material setup and creation, without the waste.

Get no-hassle, 20-second material changeovers

Forget fumbling around with ribbon rolls that are great at rolling away or threading material around rollers or print heads. Switch to a new way of material changeovers with the BradyPrinter i3300 Industrial Label Printer. The easy-to-load label rolls and self-contained ribbons snap into place for easy 20-second material changeovers without cumbersome sensor adjustments. Switch materials frequently throughout the day? You'll save time to work on your more important tasks.

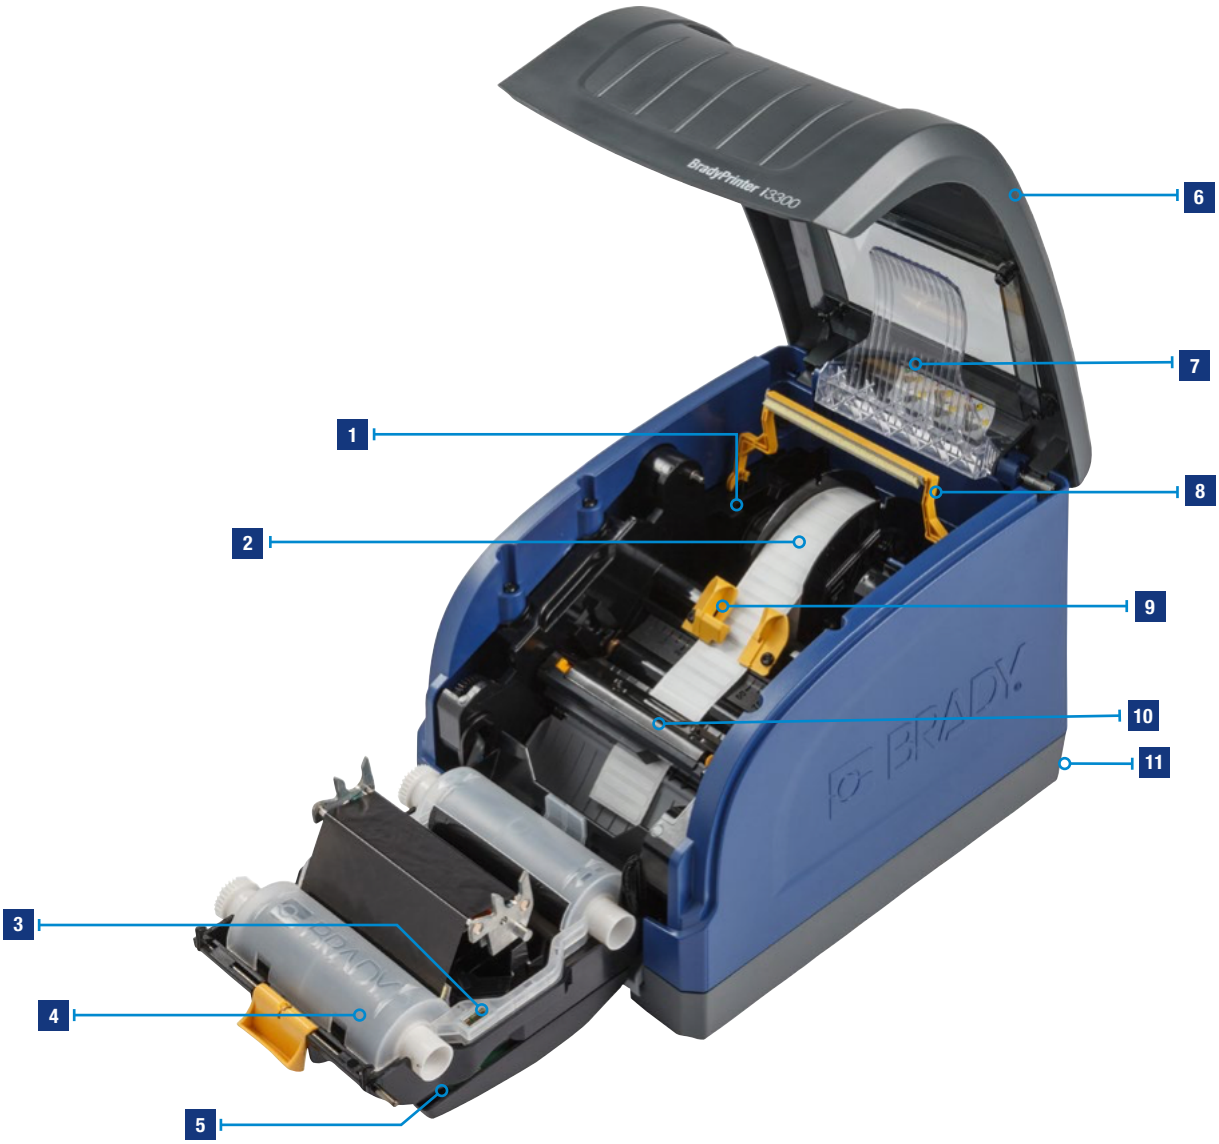

1 Media roll cartridge with auto part detection
Printer auto-detects installed label part, communicating printer setting and part setup information to both printer and Brady software

2 20-second media roll changeover
Media cartridge roll drops in and out of place quickly with minimal thread-through, no sensor adjustment, no calibration and no label waste

3 Ribbon cartridge with auto part detection
Printer auto-detects installed ribbon part, then sets correct print heat level and shows a warning if incorrect ribbon is used

4 5-second ribbon changeover
Ribbon cartridge snaps into place in one quick motion and guarantees the ink always faces the right direction to the print head

5 Color touchscreen control panel
Icons and sliders for easy printer setting adjustments and on-display part information and amount remaining

6 Top-loading design
Reduces footprint in your work area and simplifies media alignment and loading

7 Double-sided PermaSleeve bridge
Lowered into place to allow printing second side of double-sided PermaSleeve wire markers

8 Media wiper arm
Ensures dust-free surface and high print quality when printing large ink areas on continuous media. Felt pads are field-replaceable

9 Sensors located in guides
Label sensor is always correctly positioned as guides are closed, meaning no sensor location trial and error, no calibration required and no wasted labels

10 Integrated auto cutter
Built-in cutter for complete cut-through of media between labels, at end of job, or no cut at all

11 Interface options
2x USB, 1x USB 2.0, 1x Ethernet (back of printer)

BradyPrinter i3300 kits and accessories

Printer

Article No.	Order Ref.	Description
149553	i3300-C-EU	i3300 Industrial Label Printer- EU
322883	i3300-C-EU-BWS	i3300 Industrial Label Printer- EU + Brady Workstation Suite
149555	i3300-300-C-UK	i3300 Industrial Label Printer- UK
322884	i3300-C-UK-BWS	i3300 Industrial Label Printer- UK + Brady Workstation Suite
149551	i3300-300-C-US	i3300 Industrial Label Printer- US
322885	i3300-C-US-BWS	i3300 Industrial Label Printer- US + Brady Workstation Suite
149554	i3300-C-EU-WF	i3300 Industrial Label Printer with Wifi- EU
322887	i3300-C-EU-W-BWS	i3300 Industrial Label Printer with Wi-Fi - EU + Brady Workstation Suite
149556	i3300-300-C-UK-WF	i3300 Industrial Label Printer with Wi-Fi- UK
322888	i3300-C-UK-W-BWS	i3300 Industrial Label Printer with Wi-Fi- UK + Brady Workstation Suite
149552	i3300-300-C-US-WF	i3300 Industrial Label Printer with Wi-Fi - US
322889	i3300-C-US-W-BWS	i3300 Industrial Label Printer with Wi-Fi- US + Brady Workstation Suite

This i3300 printer comes in a cardboard box. It ships with a power cord, a Brady Workstation Suite, a USB cable, a product CD holding the manual, a cleaning kit and a printed quick start guide.

Accessories

Article No.	Order Ref.	Description
036612	Squeegee	Squeegee
120994	B30-TROLLEY	Trolley for S3100, i3300
133251	PCK-6	Printer Cleaning Kit, Thermal Transfer Printers
142114	B31-WIPER	Media Wiper 5 Pack
142116	B31-CCT	Cutter Cleaning Tool for BBP30, BBP31, BBP33, S3100, i3300, S3700

142116

142114

133251

036612

120994

Printer kits

Article No.	Order Ref.	Description
199986	B30-FLOOR-KIT	Floor marking kit for BBP35/BBP37/S3xxx/i3300 printers
195963	B30-SAFETY-KIT	General safety kit for BBP3x Printers
195962	B30-PM-KIT	Pipe marking kit for BBP3x Printers
195961	B30-CLP-KIT	Pre-printed GHS/CLP Chemical Labels kit for BBP3x Printers

195961

195963

199986

195962

Facility & Safety Identification

Safety signs

Pipe markers

Machine safety labels and tags

CLP/GHS Labels

Warehouse identification

Floormarking

Electrical, voice/datacom identification

Control panel labels

Self-laminating wire & cable markers



Inside panel component labels

Fibre optic cable markers

Cable tags

Wire marking sleeves

General & industrial identification

Rating plate labels

Name plates

Rough surface labels

Applications

Electronics identification

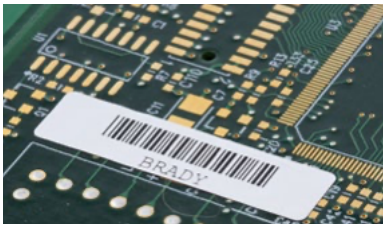

Electronic component labels

High resistant labels

Static dissipative labels

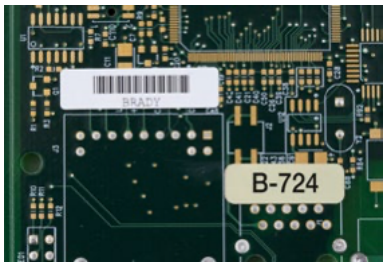

High-temperature identification labels

Laboratory identification & sample tracking

Centrifuge & PCR tube labels

Conical & large tube labels

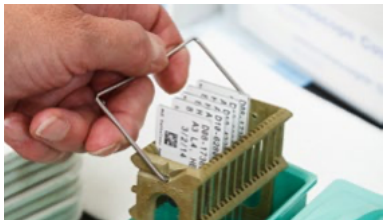

Slide labels

Tissue cassette labels

Water dissolvable labels

Well plate labels

We continuously try to improve & extend our label material offering, therefore make sure to check for firmware upgrades regularly, in order to make sure you always have access to the newest materials.

Material	
B-342	Heat-shrink Polyolefin
B-345	High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve
B-348	Polyolefin
B-413	Metallic, Non-metal Polyester
B-417	Self-laminating Vinyl
B-422	Polyester
B-423	Polyester
B-424	Paper
B-425A	Polypropylene
B-427	Self-laminating Vinyl
B-428	Metallised Polyester
B-428/B-966B	Metallised Polyester with Polyester Overlaminate
B-430	Polyester
B-432	Polyester
B-434A	Metallised Polyester
B-435A	Metallised Polyester
B-437	Polyvinylfluoride
B-438	Tamper-evident Metallised Polyester
B-439	Vinyl
B-461	Self-laminating Polyester
B-472	Polyimide
B-480A	Metallic, Non-metal Polyester
B-481	StainerBondz™ Polyester
B-482	Polyester

Material	
B-483A	Polyester
B-483A/B-634	Polyester with Polyester Overlaminate
B-486B	Metallised Polyester
B-488	Polyester
B-489A	Polyester
B-490	FreezerBondz™ Polyester
B-492	FreezerBondz™ Polyester
B-498	Vinyl Cloth
B-499	Nylon Cloth
B-509	Magnetic Polyester
B-526	Phosphorescent Polyester
B-549	Polyester
B-551	Polyester
B-565	Metallised Polyester
B-569	Polyester
B-581	Vinyl
B-584	Reflective Tape
B-593	Polyester
B-595	Vinyl
B-618	Polyester
B-719	Polyimide
B-724	Polyimide
B-728	Polyimide
B-729	Polyimide
B-7425	Polypropylene
B-7563	Metallised Polyester

Material	
B-7569	Vinyl
B-7597	Polyethylene
B-7598	Polyester
B-7599	Polyethylene
B-7641	Heat-shrink Polyolefin
B-7642	Heat-shrink Polyolefin
B-7643	Thermoplastic Polyether Polyurethane
B-767	Static Dissipative Polyimide
B-768	Static Dissipative Polyimide
B-7696	Vinyl
B-777	Polyimide
B-787	Polyvinylfluoride
B-797	Polyimide
B-8423	Polyester
B-854	Metal Detectable Polyester
B-855	Polyester
B-8591	Polymer

Next to 800+ standard parts available including more than 51 label materials, customers can also offer their own label specification for custom materials, shapes, sizes, colours and layouts that can be printed on the BradyPrinter i3300.

Print ribbons

"Drop & Click" Print ribbons for quick and easy supply changes

Order Reference	Colour	Width (mm) x Length (m)
B30-R10000	Black	110.00 x 60.00
B30-R10000-BL	Blue	110.00 x 60.00
B30-R10000-GN	Green	110.00 x 60.00
B30-R10000-OR	Orange	110.00 x 60.00
B30-R10000-RD	Red	110.00 x 60.00
B30-R10000-WT	White	110.00 x 60.00
B30-R10000-YL	Yellow	110.00 x 60.00
B30-R6000HF	Black	110.00 x 60.00
B30-R4300	Black	110.00 x 60.00
B30-R6600	Black	110.00 x 60.00
B30-R4400-WT	White	110.00 x 60.00
B30-R4500*	Silver	110.00 x 60.00
B30-R6700-WT	White	110.00 x 60.00
B30-R6400	Black	110.00 x 60.00
B30-R6200	Black	110.00 x 60.00
B30-R10000-YL2	Yellow	110.00 x 60.00
B30-R60000C	Black	110.00 x 60.00
B30-R6300	Black	109.98 x 60.96

- Tough, smear-proof ribbons that produce long-lasting printed text
- Print can withstand years in industrial areas and outdoor conditions
- Ribbons supplied in self-contained cartridges that drop straight into the printer with a "click
- No calibrating, no threading, no waste, no hassle and the ink will always be facing the right direction
- Printer notifies user if installed ribbon is not recommended for the installed labels

* This ribbon is for use with B-342 and B-345 black PermaSleeves only
** For printing yellow onto white B-595 use B30-R10000-YL. For printing yellow onto other colours of B-595 use B30-R10000-YL2
*** Black Heavy-Duty print ribbon to print Ochre B-595

See pages 49-53 for a detailed material index.

i3300 Print ribbon/material compatibility

B Number	Material		B30-R4300 Black	B30-R4400-WT White	B30-R4500 Silver	B30-R6000HF Black	B30-R6200 Black	B30-R6300 Black	B30-R6400 Black	B30-R6600 Black	B30-R6700-WT White	B30-R10000 Black	B30-R10000-WT White	B30-R10000 Blue	B30-R10000-YL2 Yellow
B-342	Heat-shrink Polyolefin	Matt	✓		✓					✓					
B-345	High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve	Matt		✓		✓				✓					
B-413	Metallic, Non-metal Polyester	Satin				✓	✓	✓							
B-417	Self-laminating Vinyl	Matt	✓				✓	✓							
B-422	Polyester	Gloss				✓	✓	✓							
B-423	Polyester	Gloss				✓	✓	✓							
B-424	Paper	Matt	✓												
B-425A	Polypropylene	Matt	✓						✓						
B-427	Self-laminating Vinyl	Matt	✓		✓		✓								
B-428/B-966B	Metallised Polyester with Polyester Overlaminate	Gloss	✓				✓	✓							
B-428	Metallised Polyester	Matt	✓												
B-430	Polyester	Gloss		✓		✓	✓	✓							
B-432	Polyester	Gloss		✓		✓									
B-434A	Metallised Polyester	Gloss				✓									
B-435A	Metallised Polyester	Gloss				✓									
B-437	Polyvinylfluoride	Matt	✓												
B-438	Tamper-evident Metallised Polyester	Matt	✓									✓			
B-439	Vinyl	Gloss		✓		✓									
B-461	Self-laminating Polyester	Matt	✓				✓	✓							
B-472	Polyimide	Matt	✓				✓	✓							
B-481	StainerBondz™ Polyester	Matt							✓						
B-482	Polyester	Matt							✓						
B-483A	Polyester	Gloss				✓									
B-484A	Polyester	Gloss				✓									
B-486B	Metallised Polyester	Matt	✓												
B-488	Polyester	Matt	✓												
B-489A	Polyester	Matt	✓												
B-490	FreezerBondz™ Polyester	Matt	✓												
B-492	FreezerBondz™ Polyester	Matt							✓						
B-498	Vinyl Cloth	Semi-gloss	✓				✓	✓							
B-499	Nylon Cloth	Matt	✓			✓	✓	✓							
B-509	Magnetic Polyester	Matt				✓						✓		✓	
B-526	Phosphorescent Polyester	Gloss				✓						✓		✓	
B-549	Polyester	Gloss								✓		✓	✓	✓	
B-551	Polyester	Matt				✓						✓		✓	
B-565	Metallised Polyester	Matt				✓						✓			
B-569	Polyester	Gloss				✓						✓	✓	✓	
B-581	Vinyl	Gloss				✓						✓	✓	✓	
B-584	Reflective Tape	Gloss				✓						✓		✓	
B-593	Polyester	Gloss		✓		✓									
B-595	Vinyl	Gloss				✓					✓	✓	✓	✓	✓
B-618	Polyester	Matt				✓									
B-724	Polyimide	Matt	✓												
B-728	Polyimide	Matt				✓									
B-729	Polyimide	Matt				✓									
B-767	Static Dissipative Polyimide	Gloss				✓		✓							
B-768	Static Dissipative Polyimide	Gloss				✓		✓							
B-777	Polyimide	Gloss						✓							
B-787	Polyvinylfluoride	Gloss				✓									
B-797	Polyimide	Gloss				✓		✓							
B-854	Metal Detectable Polyester	Matt				✓									
B-855	Polyester	Matt				✓									
B-7563	Metallised Polyester	Satin				✓	✓	✓							
B-7569	Vinyl	Gloss				✓						✓	✓	✓	
B-7597	Polyethylene	Matt	✓												
B-7641	Heat-shrink Polyolefin	Matt				✓									
B-7642	Heat-shrink Polyolefin	Matt	✓						✓						
B-8423	Polyester	Satin				✓	✓	✓							
B-8591	Polymer	Gloss								✓					

*This ribbon is for use with B-342 and B-345 Black PermaSleeves only **For printing yellow onto white B-595 use B30-R10000-YL. For printing yellow onto other colours of B-595 use B30-R10000-YL2

Pre-printed Pre-cut blank sign headers

For creating Arc Flash and safety warning labels in seconds

- Allows the printer to create multi-colour signs fast - in a single print pass
- B-595 Indoor/Outdoor grade material conforms to rough, irregular and "difficult to adhere to" surfaces
- B-483 uses an aggressive adhesive specifically designed for powder coated surfaces

Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-483A: Polyester							
⊗	B33-184-483-ANSIWA	WARNING	76.20	76.20	82.55	500	B30-R6000HF
⊗	B33-184-483-ANSIDA	DANGER	76.20	76.20	82.55	500	B30-R6000HF
⊗	B33-161-483-ANSIDA	DANGER	101.60	101.60	107.95	370	B30-R6000HF
⊗	B33-161-483-ANSIWA	WARNING	101.60	101.60	107.95	370	B30-R6000HF
B-595: Vinyl							
▲	B30-242-595-BLNKWT		28.58	72.39	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT		57.15	97.79	107.95	250	B30-R10000
▲	B30-241-595-BLNKYL		57.15	76.20	82.55	300	B30-R10000
⊗	B30-241-595-ANSIDA	DANGER	76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSICA	CAUTION	76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSIWA	WARNING	76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSINO	NOTICE	76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-OSHADA	DANGER	76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-OSHACA	CAUTION	76.20	57.15	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT		76.20	57.15	82.55	300	B30-R10000
▲	B30-25-595-BLNKYL		101.60	152.40	158.75	175	B30-R10000
⊗	B30-25-595-ANSIDA	DANGER	152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSICA	CAUTION	152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSIWA	WARNING	152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSINO	NOTICE	152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-OSHADA	DANGER	152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-OSHACA*	CAUTION	152.40	101.60	158.75	175	B30-R10000
▲	B30-25-595-BLNKWT		152.40	101.60	158.75	175	B30-R10000





* The text area below the header is yellow. Text area below other signs are white B30-R10000 coloured ribbons can also be used on these parts

B-551 Non-adhesive pre-printed & pre-cut safety tags

Pre-printed and pre-cut to save you time

- Non-adhesive semi-rigid polyester card stock
- Tags are pre-cut with hole and chamfered corners
- Perforated between tags
- Snap-in plastic grommets available for extra strength around mounting hole. Order reference: 020596

Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-551: Polyester							
☒	B30-255-551-ANSIDA	DANGER	82.55	146.05	158.75	100	B30-R10000
☒	B30-255-551-OSHADA	DANGER	82.55	146.05	158.75	100	B30-R10000
☒	B30-255-551-ANSICA	CAUTION	82.55	146.05	158.75	100	B30-R10000



B-595 High performance indoor/outdoor vinyl

For general facility and safety identification: our best industrial vinyl yet

- Durable, low-shrink vinyl with our most aggressive adhesive
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coatesurfaces)
- Adheres to “difficult low-surface energy items (PVC piping, blow-moulded equipment cases, ABS plastics, recycled plastics)



Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-595: Vinyl						
∞	B30C-500-595-BK	Black	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-BL	Blue	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-BR	Brown	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-GD	Gold	12.70	30.48	1	B30-R10000
∞	B30C-500-595-GN	Green	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-GY	Grey	12.70	30.48	1	B30-R10000
∞	B30C-500-595-OR	Orange	12.70	30.48	1	B30-R10000
∞	B30C-500-595-PL	Purple	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-RD	Red	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-CL	Transparent	12.70	30.48	1	B30-R10000
∞	B30C-500-595-WT	White	12.70	30.48	1	B30-R10000
∞	B30C-500-595-YL	Yellow	12.70	30.48	1	B30-R10000
∞	B30C-1125-595-BK	Black	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-BL	Blue	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-BR	Brown	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-GD	Gold	28.58	30.48	1	B30-R10000
∞	B30C-1125-595-GN	Green	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-GY	Grey	28.58	30.48	1	B30-R10000
∞	B30C-1125-595-OC	Ochre	28.58	30.48	1	B30-R6000OC
∞	B30C-1125-595-OR	Orange	28.58	30.48	1	B30-R10000
∞	B30C-1125-595-PL	Purple	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-RD	Red	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-CL	Transparent	28.58	30.48	1	B30-R10000
∞	B30C-1125-595-WT	White	28.58	30.48	1	B30-R10000
∞	B30C-1125-595-YL	Yellow	28.58	30.48	1	B30-R10000
∞	B30C-2250-595-BK	Black	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-BL	Blue	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-BR	Brown	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-GD	Gold	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-GN	Green	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-GY	Grey	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-OC	Ochre	57.15	30.48	1	B30-R6000OC
∞	B30C-2250-595-OR	Orange	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-PL	Purple	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-RD	Red	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-CL	Transparent	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-WT	White	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-YL	Yellow	57.15	30.48	1	B30-R10000
∞	B30C-3000-595-WT	White	76.20	30.48	1	B30-R10000
∞	B30C-3000-595-YL	Yellow	76.20	30.48	1	B30-R10000
∞	B30C-4000-595-BK	Black	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-BL	Blue	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-BR	Brown	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-GD	Gold	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-GN	Green	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-GY	Grey	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-OC	Ochre	101.60	30.48	1	B30-R6000OC
∞	B30C-4000-595-OR	Orange	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-PL	Purple	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-RD	Red	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-CL	Transparent	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-WT	White	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-YL	Yellow	101.60	30.48	1	B30-R10000

B-569 High performance polyester

For labelling stainless steel and smooth surfaces

- Low-halide content for labelling stainless steel pipes and surfaces
- Applies best to very smooth surfaces and ideal for mounting to rigid panels





Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-569: Polyester						
∞	B30C-500-569-BK	Black	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-BL	Blue	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-BR	Brown	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-GN	Green	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-GY	Grey	12.70	30.48	1	B30-R10000
∞	B30C-500-569-LB	Light Blue	12.70	30.48	1	B30-R10000
∞	B30C-500-569-OC	Ochre	12.70	30.48	1	B30-R10000
∞	B30C-500-569-OR	Orange	12.70	30.48	1	B30-R10000
∞	B30C-500-569-PK	Pink	12.70	30.48	1	B30-R10000
∞	B30C-500-569-PL	Purple	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-RD	Red	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-SB	Sky Blue	12.70	30.48	1	B30-R10000
∞	B30C-500-569-TN	Tan	12.70	30.48	1	B30-R10000
∞	B30C-500-569-CL	Transparent	12.70	30.48	1	B30-R10000
∞	B30C-500-569-WT	White	12.70	30.48	1	B30-R10000
∞	B30C-500-569-YL	Yellow	12.70	30.48	1	B30-R10000
∞	B30C-1125-569-BK	Black	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-BL	Blue	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-BR	Brown	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-GN	Green	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-GY	Grey	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-LB	Light Blue	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-OC	Ochre	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-OR	Orange	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-PK	Pink	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-PL	Purple	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-RD	Red	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-SB	Sky Blue	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-TN	Tan	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-CL	Transparent	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-WT	White	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-YL	Yellow	28.58	30.48	1	B30-R10000
∞	B30C-2250-569-BK	Black	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-BL	Blue	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-BR	Brown	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-GN	Green	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-GY	Grey	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-LB	Light Blue	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-OC	Ochre	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-OR	Orange	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-PK	Pink	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-PL	Purple	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-RD	Red	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-SB	Sky Blue	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-TN	Tan	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-CL	Transparent	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-WT	White	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-YL	Yellow	57.15	30.48	1	B30-R10000
∞	B30C-3000-569-WT	White	76.20	30.48	1	B30-R10000
∞	B30C-4000-569-BK	Black	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-BL	Blue	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-BR	Brown	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-GN	Green	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-GY	Grey	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-LB	Light Blue	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-OC	Ochre	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-OR	Orange	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-PK	Pink	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-PL	Purple	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-RD	Red	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-SB	Sky Blue	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-TN	Tan	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-CL	Transparent	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-WT	White	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-YL	Yellow	101.60	30.48	1	B30-R10000

B-595 Printable inspection and date labels

Print inspection and date labels when and how you need them

Inspection date labels can be used wherever a frequent and regular inspection of machinery and equipment is required. One example is the indication of the inspection date of fire extinguishers. Print these labels yourself to customise for your specific situation.



Diagram	Order Reference	Colour	Diameter C (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-595: Vinyl						
✕	B30-D25-595-BL	Blue	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
✕	B30-D25-595-BR	Brown	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
✕	B30-D25-595-GN	Green	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
✕	B30-D25-595-GY	Grey	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
✕	B30-D25-595-OC	Ochre	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
✕	B30-D25-595-OR	Orange	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
✕	B30-D25-595-PL	Purple	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
✕	B30-D25-595-WT	White	25 mm	28.58	1000	B30-R10000, B30-R10000-WT
✕	B30-D35-595-BL	Blue	35 mm	38.10	750	B30-R10000, B30-R10000-WT
✕	B30-D35-595-BR	Brown	35 mm	38.10	750	B30-R10000, B30-R10000-WT
✕	B30-D35-595-GN	Green	35 mm	38.10	750	B30-R10000, B30-R10000-WT
✕	B30-D35-595-GY	Grey	35 mm	38.10	750	B30-R10000, B30-R10000-WT
✕	B30-D35-595-OC	Ochre	35 mm	38.10	750	B30-R10000, B30-R10000-WT
✕	B30-D35-595-OR	Orange	35 mm	38.10	750	B30-R10000, B30-R10000-WT
✕	B30-D35-595-PL	Purple	35 mm	38.10	750	B30-R10000, B30-R10000-WT
✕	B30-D35-595-WT	White	35 mm	38.10	750	B30-R10000, B30-R10000-WT

B-595 Pre-printed right-to-know chemical labels

For quickly creating NFPA and colour bar labels

- Allows the printer to produce 5 colour chemical labels in a single print pass
- Indoor/Outdoor grade material withstands exposure to moisture, chemicals and handling



Diagram	Order Reference		Width A (mm)	Height B (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B30-244-595-DIAM		57.00	57.15	1	365	B30-R10000
▲	B30-244-595-CB		57.15	57.15	1	365	B30-R10000
▲	B30-244-595-HMIG		57.15	57.15	1	365	B30-R10000
▲	B30-246-595-HMIG		76.20	28.58	1	300	B30-R10000
▲	B30-246-595-NFR		76.20	28.58	1	300	B30-R10000
▲	B30-244-595-NFPA		76.20	57.15	1	365	B30-R10000
▲	B30-161-595-NFPA		101.00	101.60	1	240	B30-R10000
▲	B30-245-595-CB		101.60	57.15	1	240	B30-R10000
▲	B30-245-595-NFPA		101.60	57.15	1	240	B30-R10000
▲	B30-263-595-NFPA		152.40	101.60	1	170	B30-R10000
▲	B30-263-595-CB		152.40	101.60	1	170	B30-R10000

B-7569 Pre-printed CLP/GHS chemical labels

Print 2 colour CLP/GHS labels in one fast print pass

- Blank labels with pre-printed red diamonds allow printer to produce 2 colour CLP/GHS labels in one print pass
- 3 sizes of labels, each with 6 diamond layouts that match templates in Workstation software
- Indoor/outdoor vinyl material withstands exposure to moisture, chemicals and handling



Diagram	Order Reference		Width A (mm)	Height B (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B30-260-7569-CLP1		85.00	55.00	1	340	B30-R10000
▲	B30-260-7569-CLP2		85.00	55.00	1	340	B30-R10000
▲	B30-260-7569-CLP3A		85.00	55.00	1	340	B30-R10000
▲	B30-260-7569-CLP3B		85.00	55.00	1	340	B30-R10000
▲	B30-260-7569-CLP4A		85.00	55.00	1	340	B30-R10000
▲	B30-260-7569-CLP4B		85.00	55.00	1	340	B30-R10000
▲	B30-261-7569-CLP1		110.00	75.00	1	270	B30-R10000
▲	B30-261-7569-CLP2		110.00	75.00	1	270	B30-R10000
▲	B30-261-7569-CLP3A		110.00	75.00	1	270	B30-R10000
▲	B30-261-7569-CLP3B		110.00	75.00	1	270	B30-R10000
▲	B30-261-7569-CLP4A		110.00	75.00	1	270	B30-R10000
▲	B30-261-7569-CLP4B		110.00	75.00	1	270	B30-R10000
▲	B30-262-7569-CLP1		155.00	105.00	1	200	B30-R10000
▲	B30-262-7569-CLP2		155.00	105.00	1	200	B30-R10000
▲	B30-262-7569-CLP3A		155.00	105.00	1	200	B30-R10000
▲	B30-262-7569-CLP3B		155.00	105.00	1	200	B30-R10000
▲	B30-262-7569-CLP4A		155.00	105.00	1	200	B30-R10000
▲	B30-262-7569-CLP4B		155.00	105.00	1	200	B30-R10000
▲	B30-18-7569-CLP4C		76.20	25.40	1	1000	B30-R10000

Facility and safety applications:

5S Labels, pipe markers, safety & warning labels, equipment & panel labels, arc flash & chemical labels and more!

B-854 and B-855 ToughWash washdown resistant labels

Withstands pressures of high heat, harsh chemicals and numerous washdown cycles

- Ideal for use in the Food & Beverage industry
- Legible and long-lasting for even the toughest washdown cycles
- B-854 offers metal detectable layer to detect foreign debris in food stream





Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-854: Metal Detectable Polyester							
∞	B30C-4000-854-YL		101.60	-	-	1	B30-R6000HF
∞	B30C-4000-854-WT		101.60	-	-	1	B30-R6000HF
⊗	B30-25-854-WARN	WARNING	101.60	152.40	158.75	100	B30-R6000HF
⊗	B30-25-854-DANG	DANGER	101.60	152.40	158.75	100	B30-R6000HF
⊗	B30-25-854-CAUT	CAUTION	101.60	152.40	158.75	100	B30-R6000HF
B-855: Polyester							
∞	B30C-1125-855-YL		28.58	-	-	1	B30-R6000HF
∞	B30C-1125-855-WT		28.58	-	-	1	B30-R6000HF
∞	B30C-2250-855-YL		57.15	-	-	1	B30-R6000HF
∞	B30C-2250-855-WT		57.15	-	-	1	B30-R6000HF
∞	B30C-4000-855-YL		101.60	-	-	1	B30-R6000HF
∞	B30C-4000-855-WT		101.60	-	-	1	B30-R6000HF
⊗	B30-25-855-WARN	WARNING	101.60	152.40	158.75	100	B30-R6000HF
⊗	B30-25-855-DANG	DANGER	101.60	152.40	158.75	100	B30-R6000HF
⊗	B30-25-855-CAUT	CAUTION	101.60	152.40	158.75	100	B30-R6000HF

B-595 and B-7569 Pre-cut Blank labels

For general purpose, peel-off-and-apply identification

- Ideal for a wide range of labelling applications
- Includes two sizes that are pre-cut and pre-sized to fit heavy-duty rigid tags
- Indoor/Outdoor grade material



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-595: Vinyl							
▲	B30-242-595-BLNKWT	White	28.58	72.39	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT	White	76.20	57.15	82.55	300	B30-R10000
▲	B30-241-595-BLNKYL	Yellow	76.20	57.15	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT	White	97.79	57.15	107.95	250	B30-R10000
▲	B30-25-595-BLNKWT	White	152.40	101.60	158.75	175	B30-R10000
▲	B30-25-595-BLNKYL	Yellow	152.40	101.60	158.75	175	B30-R10000
B-7569: Vinyl							
▲	B30-242-7569-WT	White	28.58	72.00	82.55	300	B30-R10000
▲	B30-241-7569-WT	White	57.00	75.00	82.55	300	B30-R10000
▲	B30-219-7569-WT	White	57.00	98.00	107.95	250	B30-R10000
▲	B30-241-7569-YL	Yellow	57.00	75.00	82.55	300	B30-R10000
▲	B30-25-7569-WT	White	101.00	152.00	158.75	175	B30-R10000
▲	B30-25-7569-YL	Yellow	101.00	152.00	158.75	175	B30-R10000

B-551 Non-adhesive continuous tag stock

For safety, lockout and general purpose hanging tags

- Non-adhesive, polyester stock
- Hole punch available separately. Order reference: 020591
- Optional snap-in grommets available. Order Reference: 020596

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-551: Polyester								
	B30-255-551-WT	White	82.55	146.05	-	158.75	100	B30-R10000
∞	B30C-2500-551-WT	White	63.50	-	15.24	-	1	B30-R10000
∞	B30C-3250-551-WT	White	82.55	-	15.24	-	1	B30-R10000
∞	B30C-4250-551-WT	White	107.95	-	15.24	-	1	B30-R10000



B-584 Retro reflective tape

For Highly reflective identification that shines back brightly when struck by light

- Ideal for labelling outdoor utility poles and pedestals, jobsite equipment and roof-top equipment
- Recommended low light or inclement weather conditions

Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-584: Reflective Tape						
∞	B30C-1125-584-OR	Orange	28.58	15.24	1	B30-R10000
∞	B30C-1125-584-SL	Silver	28.58	15.24	1	B30-R10000
∞	B30C-1125-584-YL	Yellow	28.58	15.24	1	B30-R10000
∞	B30C-2250-584-OR	Orange	57.15	15.24	1	B30-R10000
∞	B30C-2250-584-SL	Silver	57.15	15.24	1	B30-R10000
∞	B30C-2250-584-YL	Yellow	57.15	15.24	1	B30-R10000
∞	B30C-4000-584-OR	Orange	101.60	15.24	1	B30-R10000
∞	B30C-4000-584-SL	Silver	101.60	15.24	1	B30-R10000
∞	B30C-4000-584-YL	Yellow	101.60	15.24	1	B30-R10000



B-526 BradyGlo High-intensity photoluminescent tape

For glow-in-the dark identification - Up to 10 hours

- Designed for directional and evacuation marking
- Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls

Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-526: Phosphorescent Polyester						
∞	B30C-1125-526	Photoluminescent Green	28.58	15.24	1	B30-R10000
∞	B30C-2250-526	Photoluminescent Green	57.15	15.24	1	B30-R10000
∞	B30C-4000-526	Photoluminescent Green	101.60	15.24	1	B30-R10000



B-787 Polyvinyl fluoride tape

Ideal for applications where self-extinguishing properties are required

Polyvinylfluoride (B-787) tape is ideal for label applications where self-extinguishing properties are required. Glossy white topcoated material with permanent acrylic adhesive Meets the colour requirements of FED-STD-595C Colour 17875 White and complies with the requirements of Boeing BMS 10-26 Type I, Grade A

Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-787: Polyvinylfluoride						
⊙	B30C-4000-787	White	101.00	18.29	1	B30-R6000HF





B-581 Repositionable vinyl

For 5S and lean applications

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable labels, like 5S and lean inventory labels
- Service temp: -40 °C to 82 °C
- Application temp: 10 °C to 82 °C

Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-581: Vinyl						
∞	B30C-500-581-WT	White	12.70	30.48	1	B30-R10000
∞	B30C-500-581-YL	Yellow	12.70	30.48	1	B30-R10000
∞	B30C-1125-581-WT	White	28.58	30.48	1	B30-R10000
∞	B30C-1125-581-YL	Yellow	28.58	30.48	1	B30-R10000
∞	B30C-2250-581-WT	White	57.15	30.48	1	B30-R10000
∞	B30C-2250-581-YL	Yellow	57.15	30.48	1	B30-R10000
∞	B30C-4000-581-WT	White	101.60	30.48	1	B30-R10000
∞	B30C-4000-581-YL	Yellow	101.60	30.48	1	B30-R10000



B-509 Printable magnetic supply

Easiest and quickest material for removing and repositioning

- Non-adhesive magnetic material that can be printed on directly
- Ideal for reusable and repositionable identification applications

Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-509: Magnetic Polyester						
∞	B30C-2500-509-WT	White	63.50	7.62	1	B30-R10000
∞	B30C-2500-509-YL	Yellow	63.50	7.62	1	B30-R10000
∞	B30C-4250-509-WT	White	107.95	7.62	1	B30-R10000
∞	B30C-4250-509-YL	Yellow	107.95	7.62	1	B30-R10000

- Superior durability
- Easy application
- High visibility
- Die-Cut shapes
- Painless Removal



Toughstripe floor marking tape

Removable area marking tape

ToughStripe is the ideal floor marking tape in a lean environment where the regular application and replacement of floor marking is crucial.

Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-483A/B-634: Polyester with Polyester Overlaminate						
∞	B30C-1125-483BK-KT	Black	29.00	30.40	1	B30-R4400
∞	B30C-1125-483BL-KT	Blue	29.00	30.40	1	B30-R4400
∞	B30C-1125-483GN-KT	Green	29.00	30.40	1	B30-R4400
∞	B30C-1125-483OR-KT	Orange	29.00	30.40	1	B30-R6000HF
∞	B30C-1125-483RD-KT	Red	29.00	30.40	1	B30-R4400
∞	B30C-1125-483WT-KT	White	29.00	30.40	1	B30-R6000HF
∞	B30C-1125-483YL-KT	Yellow	29.00	30.40	1	B30-R6000HF
∞	B30C-2250-483BK-KT	Black	57.00	30.40	1	B30-R4400
∞	B30C-2250-483BL-KT	Blue	57.00	30.40	1	B30-R4400
∞	B30C-2250-483GN-KT	Green	57.00	30.40	1	B30-R4400
∞	B30C-2250-483OR-KT	Orange	57.00	30.40	1	B30-R6000HF
∞	B30C-2250-483RD-KT	Red	57.00	30.40	1	B30-R4400
∞	B30C-2250-483WT-KT	White	57.00	30.40	1	B30-R6000HF
∞	B30C-2250-483YL-KT	Yellow	57.00	30.40	1	B30-R6000HF
∞	B30C-3000-483WT-KT	White	75.00	30.40	1	B30-R6000HF
∞	B30C-3000-483YL-KT	Yellow	75.00	30.40	1	B30-R6000HF
∞	B30C-4000-483BK-KT	Black	101.00	30.40	1	B30-R4400
∞	B30C-4000-483BL-KT	Blue	101.00	30.40	1	B30-R4400
∞	B30C-4000-483GN-KT	Green	101.00	30.40	1	B30-R4400
∞	B30C-4000-483OR-KT	Orange	101.00	30.40	1	B30-R6000HF
∞	B30C-4000-483RD-KT	Red	101.00	30.40	1	B30-R4400
∞	B30C-4000-483WT-KT	White	101.00	30.40	1	B30-R6000HF
∞	B30C-4000-483YL-KT	Yellow	101.00	30.40	1	B30-R6000HF

B-7569 Indoor/Outdoor vinyl

General purpose industrial vinyl for indoor/outdoor usage

- High gloss, durable and flexible identification material
- Adheres to difficult low surface energy materials
- Can handle up to 75°C, which meets industry maintenance temperatures
- Low-shrink vinyl



Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-7569: Vinyl						
∞	B30C-500-7569-BK	Black	12.70	30.00	1	B30-R10000-WT
∞	B30C-500-7569-BL	Blue	12.70	30.00	1	B30-R10000-WT
∞	B30C-500-7569-GN	Green	12.70	30.00	1	B30-R10000-WT
∞	B30C-500-7569-OR	Orange	12.70	30.00	1	B30-R10000
∞	B30C-500-7569-RD	Red	12.70	30.00	1	B30-R10000-WT
∞	B30C-500-7569-WT	White	12.70	30.00	1	B30-R10000
∞	B30C-500-7569-YL	Yellow	12.70	30.00	1	B30-R10000
∞	B30C-1125-7569-BK	Black	29.00	30.00	1	B30-R10000-WT
∞	B30C-1125-7569-BL	Blue	29.00	30.00	1	B30-R10000-WT
∞	B30C-1125-7569-GN	Green	29.00	30.00	1	B30-R10000-WT
∞	B30C-1125-7569-OR	Orange	29.00	30.00	1	B30-R10000
∞	B30C-1125-7569-RD	Red	29.00	30.00	1	B30-R10000-WT
∞	B30C-1125-7569-WT	White	29.00	30.00	1	B30-R10000
∞	B30C-1125-7569-YL	Yellow	29.00	30.00	1	B30-R10000
∞	B30C-2250-7569-BK	Black	57.00	30.00	1	B30-R10000-WT
∞	B30C-2250-7569-BL	Blue	57.00	30.00	1	B30-R10000-WT
∞	B30C-2250-7569-GN	Green	57.00	30.00	1	B30-R10000-WT
∞	B30C-2250-7569-OR	Orange	57.00	30.00	1	B30-R10000
∞	B30C-2250-7569-RD	Red	57.00	30.00	1	B30-R10000-WT
∞	B30C-2250-7569-WT	White	57.00	30.00	1	B30-R10000
∞	B30C-2250-7569-YL	Yellow	57.00	30.00	1	B30-R10000
∞	B30C-3000-7569-WT	White	75.00	30.00	1	B30-R10000
∞	B30C-3000-7569-YL	Yellow	75.00	30.00	1	B30-R10000
∞	B30C-4000-7569-BK	Black	101.00	30.00	1	B30-R10000-WT
∞	B30C-4000-7569-BL	Blue	101.00	30.00	1	B30-R10000-WT
∞	B30C-4000-7569-GN	Green	101.00	30.00	1	B30-R10000-WT
∞	B30C-4000-7569-OR	Orange	101.00	30.00	1	B30-R10000
∞	B30C-4000-7569-RD	Red	101.00	30.00	1	B30-R10000-WT
∞	B30C-4000-7569-WT	White	101.00	30.00	1	B30-R10000
∞	B30C-4000-7569-YL	Yellow	101.00	30.00	1	B30-R10000

B-549 Cold temperature application material

For identification in temperature as cold as -40°C

- Special adhesive permanently adheres to extremely cold surfaces
- Ideal for cold storage warehouses, fridges, freezers and short-term outdoor use in winter
- Service temp: -40 °C to 100 °C
- Application temp: -23 °C to 100 °C



Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-549: Polyester						
∞	B30C-1125-549-WT	White	28.58	30.48	1	B30-R10000
∞	B30C-1125-549-YL	Yellow	28.58	30.48	1	B30-R10000
∞	B30C-2250-549-WT	White	57.15	30.48	1	B30-R10000
∞	B30C-2250-549-YL	Yellow	57.15	30.48	1	B30-R10000
∞	B30C-4000-549-WT	White	101.60	30.48	1	B30-R10000
∞	B30C-4000-549-YL	Yellow	101.60	30.48	1	B30-R10000

B-593 Raised profile labels - Push button style

Lower cost than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (total thickness = 0.65 mm)
- High performance, low cost substitute to engraved plates
- 10 year outdoor durability rating
- On-demand labelling: labels print out in less than 4 seconds
- 5 push button sizes (including keyed with 22.50 and 30.50 mm hole diam and non-keyed with 22.50 mm hole diam)





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-593: Polyester							
●	B30EP-167-593-BK	Black	30.48	38.10	44.45	200	B30-R4400-WT
●	B30EP-167-593-GN	Green	30.48	38.10	44.45	200	B30-R4400-WT
●	B30EP-167-593-RD	Red	30.48	38.10	44.45	200	B30-R4400-WT
●	B30EP-167-593-WT	White	30.48	38.10	44.45	200	B30-R6000HF
●	B30EP-167-593-YL	Yellow	30.48	38.10	44.45	200	B30-R6000HF
▶	B30EP-167U-593-BK	Black	30.48	38.10	44.45	200	B30-R4400-WT
▶	B30EP-167U-593-GN	Green	30.48	38.10	44.45	200	B30-R4400-WT
▶	B30EP-167U-593-RD	Red	30.48	38.10	44.45	200	B30-R4400-WT
▶	B30EP-167U-593-WT	White	30.48	38.10	44.45	200	B30-R6000HF
▶	B30EP-167U-593-YL	Yellow	30.48	38.10	44.45	200	B30-R6000HF
●	B30EP-168-593-BK	Black	30.48	48.26	53.98	180	B30-R4400-WT
●	B30EP-168-593-GN	Green	30.48	48.26	53.98	180	B30-R4400-WT
●	B30EP-168-593-RD	Red	30.48	48.26	53.98	180	B30-R4400-WT
●	B30EP-168-593-WT	White	30.48	48.26	53.98	180	B30-R6000HF
●	B30EP-168-593-YL	Yellow	30.48	48.26	53.98	180	B30-R6000HF
●	B30EP-169-593-BK	Black	45.72	45.72	50.80	190	B30-R4400-WT
●	B30EP-169-593-GN	Green	45.72	45.72	50.80	190	B30-R4400-WT
●	B30EP-169-593-RD	Red	45.72	45.72	50.80	190	B30-R4400-WT
●	B30EP-169-593-WT	White	45.72	45.72	50.80	190	B30-R6000HF
●	B30EP-169-593-YL	Yellow	45.72	45.72	50.80	190	B30-R6000HF
●	B30EP-170-593-BK	Black	60.96	60.96	66.68	145	B30-R4400-WT
●	B30EP-170-593-GN	Green	60.96	60.96	66.68	145	B30-R4400-WT
●	B30EP-170-593-RD	Red	60.96	60.96	66.68	145	B30-R4400-WT
●	B30EP-170-593-WT	White	60.96	60.96	66.68	145	B30-R6000HF
●	B30EP-170-593-YL	Yellow	60.96	60.96	66.68	145	B30-R6000HF

B-593 Raised profile labels

Lower cost than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.65 mm)
- Ideal for inside-panel backer board labels and front-of-enclosure labelling
- On-demand labelling: labels print out in less than 4 seconds
- No need to abbreviate your text to avoid per character engraving charges
- 10-year outdoor durability rating
- 6 colours, 7 rectangular sizes





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-593: Polyester							
▲	B30EP-171-593-BK	Black	26.92	12.45	19.05	500	B30-R4400-WT
▲	B30EP-171-593-GN	Green	26.92	12.45	19.05	500	B30-R4400-WT
▲	B30EP-171-593-RD	Red	26.92	12.45	19.05	500	B30-R4400-WT
▲	B30EP-171-593-SL	Silver	26.92	12.45	19.05	500	B30-R6000HF
▲	B30EP-171-593-WT	White	26.92	12.45	19.05	500	B30-R6000HF
▲	B30EP-171-593-YL	Yellow	26.92	12.45	19.05	500	B30-R6000HF
▲	B30EP-172-593-BK	Black	44.96	15.00	21.59	450	B30-R4400-WT
▲	B30EP-172-593-GN	Green	44.96	15.00	21.59	450	B30-R4400-WT
▲	B30EP-172-593-RD	Red	44.96	15.00	21.59	450	B30-R4400-WT

>>

B-593 Raised profile labels (contined)

Lower cost than engraved legend plates



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B30EP-172-593-SL	Silver	44.96	15.00	21.59	450	B30-R6000HF
▲	B30EP-172-593-WT	White	44.96	15.00	21.59	450	B30-R6000HF
▲	B30EP-172-593-YL	Yellow	44.96	15.00	21.59	450	B30-R6000HF
▲	B30EP-173-593-BK	Black	50.80	25.40	31.75	300	B30-R4400-WT
▲	B30EP-173-593-GN	Green	50.80	25.40	31.75	300	B30-R4400-WT
▲	B30EP-173-593-RD	Red	50.80	25.40	31.75	300	B30-R4400-WT
▲	B30EP-173-593-SL	Silver	50.80	25.40	31.75	300	B30-R6000HF
▲	B30EP-173-593-WT	White	50.80	25.40	31.75	300	B30-R6000HF
▲	B30EP-173-593-YL	Yellow	50.80	25.40	31.75	300	B30-R6000HF
▲	B30EP-174-593-BK	Black	101.60	25.40	28.58	300	B30-R4400-WT
▲	B30EP-174-593-GN	Green	101.60	25.40	28.58	300	B30-R4400-WT
▲	B30EP-174-593-RD	Red	101.60	25.40	28.58	300	B30-R4400-WT
▲	B30EP-174-593-SL	Silver	101.60	25.40	28.58	300	B30-R6000HF
▲	B30EP-174-593-WT	White	101.60	25.40	28.58	300	B30-R6000HF
▲	B30EP-174-593-YL	Yellow	101.60	25.40	28.58	300	B30-R6000HF
▲	B30EP-175-593-BK	Black	76.20	19.05	25.40	375	B30-R4400-WT
▲	B30EP-175-593-GN	Green	76.20	19.05	25.40	375	B30-R4400-WT
▲	B30EP-175-593-WT	White	76.20	19.05	25.40	375	B30-R6000HF
▲	B30EP-175-593-YL	Yellow	76.20	19.05	25.40	375	B30-R6000HF
▲	B30EP-176-593-BK	Black	76.20	25.40	31.75	300	B30-R4400-WT
▲	B30EP-176-593-GN	Green	76.20	25.40	31.75	300	B30-R4400-WT
▲	B30EP-176-593-WT	White	76.20	25.40	31.75	300	B30-R6000HF
▲	B30EP-176-593-YL	Yellow	76.20	25.40	31.75	300	B30-R6000HF
▲	B30EP-177-593-BK	Black	76.20	63.50	69.85	125	B30-R4400-WT
▲	B30EP-177-593-GN	Green	76.20	63.50	69.85	125	B30-R4400-WT
▲	B30EP-177-593-WT	White	76.20	63.50	69.85	125	B30-R6000HF
▲	B30EP-177-593-YL	Yellow	76.20	63.50	69.85	125	B30-R6000HF

Inside-panel component labels

For automation & electrical panels and enclosures



- Various sizes in several durable material types
- Ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components







Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-422: Polyester									
⊙	B33C-375-422	White	9.53	–	–	25.91	–	1	B30-R6000HF
B-483A: Polyester									
⬢	B33-149-483	White	12.70	12.70	–	–	15.24	5000	B30-R6000HF
⬢	B33-5-483	White	25.40	12.70	–	–	15.24	5000	B30-R6000HF
▲	B33-17-483	White	50.80	25.40	–	–	28.58	1500	B30-R6000HF
▲	B33-7-483	White	69.85	31.75	–	–	34.93	1000	B30-R6000HF
▲	B33-19-483	White	76.20	50.80	–	–	53.98	500	B30-R6000HF
▲	B33-18-483	White	76.20	25.40	–	–	28.58	1500	B30-R6000HF
▲	B33-55-483	White	101.60	50.80	–	–	53.98	750	B30-R6000HF
B-484A: Polyester									
▲	B33-125-484	White	22.86	12.70	–	–	15.24	1500	B30-R6000HF
⬢	B33-5-484	White	25.40	12.70	–	–	15.24	5000	B30-R6000HF
▲	B33-136-484	White	38.10	19.05	–	–	22.23	1500	B30-R6000HF
▲	B33-17-484	White	50.80	25.40	–	–	28.58	1500	B30-R6000HF
▲	B33-18-484	White	76.20	25.40	–	–	28.58	1500	B30-R6000HF
▲	B33-19-484	White	76.20	50.80	–	–	53.98	500	B30-R6000HF
▲	B33-55-484	White	101.60	50.80	–	–	53.98	750	B30-R6000HF
▲	B33-161-484	White	101.60	101.60	–	–	104.78	350	B30-R6000HF

>>











Inside-panel component labels (continued)

For automation & electrical panels and enclosures

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-498: Vinyl Cloth									
⬢	B33-90-498	White	6.35	36.50	–	–	39.70	2500	B30-R6200
⬢	B33-87-498	White	12.70	36.50	–	–	39.70	2500	B30-R6200
⬢	B33-68-498	White	12.70	19.05	–	–	21.59	5000	B30-R6200
⬢	B33-1-498	White	19.05	6.35	–	–	8.89	5000	B30-R6200
▲	B33-254-498	White	19.05	19.05	–	–	21.59	1000	B30-R6200
⬢	B33-95-498	White	20.32	36.50	–	–	39.70	2300	B30-R6200
⬢	B33-88-498	White	25.40	19.05	–	–	22.23	2500	B30-R6200
⬢	B33-5-498	White	25.40	12.70	–	–	15.24	5000	B30-R6200
⬢	B33-89-498	White	25.40	36.50	–	–	39.70	2300	B30-R6200
⬢	B33-325-498	White	25.40	63.50	–	–	66.68	700	B30-R6200
⬢	B33-326-498	White	25.40	101.60	–	–	104.78	450	B30-R6200
⬢	B33-327-498	White	38.10	101.60	–	–	104.78	450	B30-R6200
⬢	B33-328-498	White	38.10	152.40	–	–	155.58	300	B30-R6200
B-499: Nylon Cloth									
⬢	B33-68-499	White	12.70	19.05	–	–	21.59	1500	B30-R4300
⬢	B33-165-499	White	20.32	36.50	–	–	39.70	2500	B30-R4300
▲	B33-125-499	White	22.86	12.70	–	–	15.24	1500	B30-R4300
⬢	B33-152-499	White	25.40	9.53	–	–	12.07	1500	B30-R4300
▲	B33-136-499	White	38.10	19.05	–	–	22.23	1500	B30-R4300
▲	B33-151-499	White	50.80	6.35	–	–	8.89	1500	B30-R4300
/	B33-143-499	White	–	–	9.53	–	12.70	1500	B30-R4300
/	B33-144-499	White	–	–	12.70	–	15.88	1500	B30-R4300
/	B33-602-499	White	–	–	9.53	–	16.50	3000	B30-R6000HF
/	B33-603-499	White	–	–	12.70	–	15.70	3000	B30-R6000HF
/	B33-602-499YL	Yellow	–	–	9.53	–	16.50	3000	B30-R6000HF
/	B33-603-499YL	Yellow	–	–	12.70	–	15.70	3000	B30-R6000HF
B-593: Polyester									
▲	B30EP-171-593-BK	Black	26.92	12.45	–	–	19.05	500	B30-R4400-WT
▲	B30EP-171-593-SL	Silver	26.92	12.45	–	–	19.05	500	B30-R6000HF
▲	B30EP-171-593-WT	White	26.92	12.45	–	–	19.05	500	B30-R6000HF
B-595: Vinyl									
∞	B30C-500-595-WT	White	12.70	–	–	30.48	–	1	B30-R10000
∞	B30C-500-595-YL	Yellow	12.70	–	–	30.48	–	1	B30-R10000



Self-laminating wire & cable markers

Brady's most popular wire marker

- Features white printable area with clear "tail" that wraps around marker to protect text
- Superior resistance to abrasion, handling, solvents, water, oil and dirt
- B-427 uses a permanent acrylic adhesive designed specifically for tightly curved surfaces
- B-417 offers an extra-strong permanent adhesive acrylic adhesive ideal for small-gauge wires

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-417: Self-laminating Vinyl								
⬟	B33-80-417	White, Transparent	12.70	19.05	9.53	24.13	2500	B30-R4300
⬟	B33-114-417	White, Transparent	12.70	31.75	12.70	34.93	4000	B30-R4300
⬟	B33-8-417	White, Transparent	12.70	36.50	12.70	41.28	5000	B30-R4300
⬟	B33-56-417	White, Transparent	19.05	23.80	9.53	28.58	5000	B30-R4300
⬟	B33-73-417	White, Transparent	19.05	44.45	12.70	47.63	3500	B30-R4300
⬟	B33-116-417	White, Transparent	25.40	25.40	9.53	28.58	2500	B30-R4300
⬟	B33-117-417	White, Transparent	25.40	31.75	12.70	34.93	2000	B30-R4300

>>

Self-laminating wire & cable markers (continued)

Brady's most popular wire marker









Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
⬟	B33-9-417	White, Transparent	25.40	36.50	12.70	41.28	2500	B30-R4300
⬟	B33-75-417	White, Transparent	25.40	57.15	19.05	60.33	1400	B30-R4300
⬟	B33-10-417	White, Transparent	25.40	95.25	25.40	101.60	1200	B30-R4300
⬟	B33-81-417	White, Transparent	25.40	152.40	38.10	157.15	500	B30-R4300
◗	B33-119-417	White, Transparent	38.10	38.10	12.70	41.28	1000	B30-R4300
◗	B33-27-417	White, Transparent	50.80	95.25	25.40	101.60	400	B30-R4300
◗	B33-26-417	White, Transparent	63.50	57.15	19.05	61.93	500	B30-R4300
B-427: Self-laminating Vinyl								
◗	B33-8-427	White, Transparent	12.70	36.50	12.70	41.30	5000	B30-R4300
◗	B33-80-427	White, Transparent	12.70	19.05	9.53	24.13	2500	B30-R4300
◗	B33-113-427	White, Transparent	12.70	25.40	9.53	28.58	2500	B30-R4300
⬟	B33-114-427	White, Transparent	12.70	31.75	12.70	34.93	4000	B30-R4300
◗	B33-73-427	White, Transparent	19.05	44.45	12.70	47.60	3500	B30-R4300
◗	B33-56-427	White, Transparent	19.05	23.80	9.53	28.58	5000	B30-R4300
◗	B33-74-427	White, Transparent	20.32	36.50	12.70	41.30	4000	B30-R4300
◗	B33-115-427	White, Transparent	25.40	19.05	9.53	21.59	2500	B30-R4300
◗	B33-131-427	White, Transparent	25.40	66.68	25.40	28.58	1500	B30-R4300
◗	B33-9-427	White, Transparent	25.40	36.50	12.70	41.30	2500	B30-R4300
◗	B33-81-427	White, Transparent	25.40	152.40	38.10	157.10	500	B30-R4300
◗	B33-75-427	White, Transparent	25.40	57.15	19.05	60.30	1400	B30-R4300
◗	B33-10-427	White, Transparent	25.40	95.25	25.40	101.60	1200	B30-R4300
◗	B33-116-427	White, Transparent	25.40	25.40	9.53	28.58	2500	B30-R4300
◗	B33-117-427	White, Transparent	25.40	31.75	12.70	34.93	2000	B30-R4300
◗	B33-211-427	White, Transparent	25.40	25.40	9.65	32.13	3000	B30-R4300
◗	B33-311-427	White, Transparent	25.40	31.75	12.70	37.72	3000	B30-R4300
◗	B33-511-427	White, Transparent	25.40	63.50	19.05	70.64	1500	B30-R4300
▲	B33-135-427AW	White	38.10	19.05	19.05	22.23	1500	B30-R4300
◗	B33-272-427	White, Transparent	38.10	57.15	19.05	63.50	700	B30-R4300
◗	B33-119-427	White, Transparent	38.10	38.10	12.70	44.45	1000	B30-R4300
◗	B33-118-427	White, Transparent	38.10	25.40	9.53	28.58	1250	B30-R4300
◗	B33-517-427	White, Transparent	38.10	63.50	19.05	69.85	1000	B30-R4300
◗	B33-273-427	White, Transparent	44.45	57.15	19.05	63.50	500	B30-R4300
◗	B33-121-427	White, Transparent	44.45	38.10	12.70	44.45	1000	B30-R4300
◗	B33-120-427	White, Transparent	44.45	25.40	9.53	28.58	1250	B30-R4300
▲	B33-137-427AW	White	50.80	25.40	25.40	28.58	1500	B30-R4300
◗	B33-82-427	White, Transparent	50.80	152.40	38.10	157.15	200	B30-R4300
◗	B33-27-427	White, Transparent	50.80	95.25	25.40	101.60	400	B30-R4300
▲	B33-640-427AW	White	55.88	38.10	–	45.08	1500	B30-R4300
◗	B33-26-427	White, Transparent	63.50	57.15	19.05	61.90	500	B30-R4300
▲	B33-648-427AW	White	66.68	25.40	–	32.38	1500	B30-R4300

B-425 Fibre optic labels

Ideal for marking fibre optic cables

- Allows you to handle and view labels without touching the wires.





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-425A: Polypropylene							
▙	B33FP-01-425	White	30.00	10.00	26.03	1000	B30-R4300
T	B33FT-01-425	White	30.00	10.00	46.03	1000	B30-R4300



B-427 rotating self-laminating labels

Legible from any angle: identify cables faster

- The B-427 self-laminating Rotating Label version can increase the speed of cable identification because its print can be read from any angle.
- The label can be rotated around a cable thanks to a non-adhesive printable zone and a translucent, self-adhesive laminate that is wrapped around a cable.

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-427: Self-laminating Vinyl								
RO	B33RO-292-427	White, Transparent	12.70	44.45	17.78	65.41	1500	B30-R4300
RO	B33RO-293-427	White, Transparent	12.70	69.85	27.94	100.97	900	B30-R4300
RO	B33RO-294-427	White, Transparent	25.40	44.45	17.78	65.41	1000	B30-R4300
RO	B33RO-295-427	White, Transparent	25.40	69.85	27.94	100.97	700	B30-R4300
RO	B33RO-296-427	White, Transparent	25.40	79.38	31.75	114.30	600	B30-R4300
RO	B33RO-297-427	White, Transparent	25.40	30.48	12.70	46.36	600	B30-R4300
RO	B33RO-299-427	White, Transparent	50.80	79.38	31.75	114.30	250	B30-R4300



B-483 QuickFlag tapered wire and cable flag labels

One-sided labels

- Quickly flag wires and cables with the B-483 QuickFlag™ label material, featuring a tapered design to prevent mismatched edges and make flag installation much faster.

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Printable Area Width PW (mm)	Labels per Roll	Printer Ribbon Series
B-483A: Polyester								
	B33-360-483	White, Transparent	25.40 mm	50.80 mm	25.40 mm	25.40 mm	1500	B30-R6000HF
	B33-361-483	White, Transparent	48.26 mm	50.80 mm	25.40 mm	48.26 mm	1500	B30-R6000HF





B-498 Adhesive terminal block markers

Holds strong but can be removed cleanly and re-applied

- Specially designed narrow-width continuous label for alignment on terminal blocks and patch panels
- Highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and re-application

Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-498: Vinyl Cloth							
	B33C-312-498	White	7.92	25.91	–	1	B30-R6200
	B33C-375-498	White	9.53	25.91	–	1	B30-R6200





B-498 Repositionable vinyl cloth wire & cable markers

Holds strong but can be removed cleanly and re-applied

- A vinyl cloth label for marking wires, cables and inside-panel components
- Highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and re-application
- Ideal choice for marking both ends of a wire that you may need to cut shorted before final termination

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-498: Vinyl Cloth							
	B33-1-498	White	19.05	6.35	8.89	5000	B30-R6200
	B33-254-498	White	19.05	19.05	21.59	1000	B30-R6200
	B33-325-498	White	25.40	63.50	66.68	700	B30-R6200
	B33-326-498	White	25.40	101.60	104.78	450	B30-R6200
	B33-327-498	White	38.10	101.60	104.78	450	B30-R6200
	B33-5-498	White	25.40	12.70	15.24	5000	B30-R6200

>>

B-498 Repositionable vinyl cloth wire & cable markers (continued)

Holds strong but can be removed cleanly and re-applied



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
⬢	B33-68-498	White	12.70	19.05	21.59	5000	B30-R6200
⬢	B33-87-498	White	12.70	36.50	39.70	2500	B30-R6200
⬢	B33-88-498	White	25.40	19.05	22.23	2500	B30-R6200
⬢	B33-89-498	White	25.40	36.50	39.70	2300	B30-R6200
⬢	B33-90-498	White	6.35	36.50	39.70	2500	B30-R6200
⬢	B33-91-498	White	19.05	23.80	27.00	2500	B30-R6200
⬢	B33-95-498	White	20.32	36.50	39.70	2300	B30-R6200

B-499 Wire & cable markers

This nylon cloth material has superb adhesive power, making it a flexible all surfaces solution





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-499: Nylon Cloth							
⬢	B33-87-499	White	12.70	36.50	39.67	2500	B30-R6000HF
⬢	B33-611-499	White	12.70	25.40	28.40	3000	B30-R6000HF
▲	B33-620-499	White	12.70	25.40	28.40	1000	B30-R6000HF
⬢	B33-1-499	White	19.05	6.35	8.89	10000	B30-R6000HF
▲	B33-254-499	White	19.05	19.05	21.59	1000	B30-R6000HF
⬢	B33-91-499	White	19.05	23.80	26.97	2500	B30-R6000HF
▲	B33-125-499	White	22.86	12.70	15.24	1500	B30-R4300
⬢	B33-152-499	White	25.40	9.53	12.07	1500	B30-R4300
⬢	B33-5-499	White	25.40	12.70	15.24	5000	B30-R6000HF
⬢	B33-88-499	White	25.40	19.05	22.23	2500	B30-R6000HF
⬢	B33-89-499	White	25.40	36.50	39.67	2300	B30-R6000HF
⬢	B33-325-499	White	25.40	63.50	66.68	700	B30-R6000HF
⬢	B33-326-499	White	25.40	101.60	104.78	450	B30-R6000HF
⬢	B33-621-499	White	25.40	36.50	39.50	3000	B30-R6000HF
⬢	B33-625-499	White	25.40	66.68	69.68	1500	B30-R6000HF
▲	B33-659-499	White	25.40	12.45	15.40	1000	B30-R6000HF
⬢	B33-327-499	White	38.10	101.60	104.78	450	B30-R6000HF
⬢	B33-328-499	White	38.10	152.40	155.58	300	B30-R6000HF
▲	B33-151-499	White	50.80	6.35	8.89	1500	B30-R4300
⬢	B33-90-499	White	6.35	36.50	39.67	2500	B30-R6000HF

B-437 Tedlar adhesive wire & cable labels

Topcoated Polyvinylflouride label for wire & cable marking where high temperature and self-extinguishing features are required

- Heavy duty performance with excellent resistance to water, oil and other fluids
- Meets MIL–M-87958 Standard





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-437: Polyvinylfluoride								
⊙	B30C-4000-437	White	101.60	–	45.72	–	1	B30-R4300
⬢	B33-11-437	White	6.35	6.35		9.53	15000	B30-R4300
⬢	B33-1-437	White	19.05	6.35		8.89	5000	B30-R4300
⬢	B33-29-437	White	31.75	9.53		12.07	5000	B30-R4300
⬢	B33-29-437YL	Yellow	31.75	9.53		12.07	5000	B30-R4300
⬢	B33-5-437	White	25.40	12.70		15.19	5000	B30-R4300
⬢	B33-5-437YL	Yellow	25.40	12.70		15.19	5000	B30-R4300

>>



B-437 Tedlar adhesive wire & cable labels (continued)

Topcoated Polyvinylflouride label for wire & cable marking where high temperature and self-extinguishing features are required

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
	B33C-1000-437	White	25.40	–	25.91	–	1	B30-R4300
	B33C-1000-437YL	Yellow	25.40	–	25.91	–	1	B30-R4300
	B33C-1500-437	White	38.10	–	25.91	–	1	B30-R4300
	B33C-2000-437	White	50.80	–	25.91	–	1	B30-R4300
	B33C-2000-437YL	Yellow	50.80	–	25.91	–	1	B30-R4300
	B33C-3000-437	White	76.20	–	25.91	–	1	B30-R4300



B-7599 Polyethylene tag

Rapido wire marking sleeves

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7599: Polyethylene							
	B33R-01-7599-YL	Yellow	23.00	5.20	8.39	2500	B30-R4300, B30-R6200
	B33R-02-7599-YL	Yellow	23.00	5.20	8.39	2500	B30-R4300, B30-R6200
	B33R-03-7599-YL	Yellow	25.00	5.70	8.89	2500	B30-R4300, B30-R6200





B-472 Polyimide high temp adhesive wire & cable labels

Topcoated Polyimide label for wire & cable marking where high temperature and self-extinguishing features are required

- Heavy duty performance with excellent resistance to water, oil and other fluids

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-472: Polyimide								
	B33-11-472	White	6.35	6.35		9.53	15000	B30-R4300
	B33-1-472	White	19.05	6.35		8.89	5000	B30-R4300
	B33-2-472	White	22.86	6.35		8.89	5000	B30-R4300
	B33-29-472	White	31.75	9.53		12.07	5000	B30-R4300
	B33-5-472	White	25.40	12.70		15.24	5000	B30-R4300
	B33-5-472YL	Yellow	25.40	12.70		15.24	5000	B30-R4300
	B33C-1000-472	White	25.40	–	25.91	–	1	B30-R4300
	B33C-1000-472YL	Yellow	25.40	–	25.91	–	1	B30-R4300
	B33C-1500-472	White	38.10	–	25.91	–	1	B30-R4300
	B33C-1500-472YL	Yellow	38.10	–	25.91	–	1	B30-R4300
	B33C-2000-472	White	50.80	–	25.91	–	1	B30-R4300
	B33C-2000-472YL	Yellow	50.80	–	25.91	–	1	B30-R4300
	B33C-3000-472	White	76.20	–	25.91	–	1	B30-R4300
	B33C-3000-472YL	Yellow	76.20	–	25.91	–	1	B30-R4300



B-7597 Tear resistant tags

This tag can be used for a variety of applications including identification of multi-conductor cables, inventory and equipment

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7597: Polyethylene							
	B33-7597W-2050	White	50.80	12.70	16.72	2000	B30-R4300

B-7598 Polyester cable tag

Durable outdoor cable identification



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7598: Polyester							
	B33-60x10-7598-BK	Black	60.00	10.00	15.08	1000	B30-R4400-WT
	B33-60x10-7598-BL	Blue	60.00	10.00	15.08	1000	B30-R6000HF
	B33-60x10-7598-GN	Green	60.00	10.00	15.08	1000	B30-R6000HF
	B33-60x10-7598-RD	Red	60.00	10.00	15.08	1000	B30-R6000HF
	B33-60x10-7598-SV	Silver	60.00	10.00	15.08	1000	B30-R6000HF
	B33-60x10-7598-WT	White	60.00	10.00	15.08	1000	B30-R6000HF
	B33-60x10-7598-YL	Yellow	60.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-BK	Black	75.00	10.00	15.08	1000	B30-R4400-WT
	B33-75x10-7598-BL	Blue	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-GN	Green	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-RD	Red	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-SV	Silver	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-WT	White	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-YL	Yellow	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x15-7598-BK	Black	75.00	15.00	20.02	1000	B30-R4400-WT
	B33-75x15-7598-BL	Blue	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x15-7598-GN	Green	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x15-7598-RD	Red	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x15-7598-SV	Silver	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x15-7598-WT	White	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x15-7598-YL	Yellow	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x25-7598-BK	Black	75.00	25.00	30.16	500	B30-R4400-WT
	B33-75x25-7598-BL	Blue	75.00	25.00	30.16	500	B30-R6000HF
	B33-75x25-7598-GN	Green	75.00	25.00	30.16	500	B30-R6000HF
	B33-75x25-7598-RD	Red	75.00	25.00	30.16	500	B30-R6000HF
	B33-75x25-7598-SV	Silver	75.00	25.00	30.16	500	B30-R6000HF
	B33-75x25-7598-WT	White	75.00	25.00	30.16	500	B30-R6000HF
	B33-75x25-7598-YL	Yellow	75.00	25.00	30.16	500	B30-R6000HF

B-7643 Halogen-free cable tag

Easily print cable tags wherever you are



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7643: Thermoplastic Polyether Polyurethane							
	B33-60X10-7643-BK	Black	60.00	10.00	15.08	750	B30-R4400-WT
	B33-60X10-7643-BL	Blue	60.00	10.00	15.08	750	B30-R6000HF
	B33-60X10-7643-GN	Green	60.00	10.00	15.08	750	B30-R6000HF
	B33-60X10-7643-OR	Orange	60.00	10.00	15.08	750	B30-R6000HF
	B33-60X10-7643-RD	Red	60.00	10.00	15.08	750	B30-R6000HF
	B33-60X10-7643-YL	Yellow	60.00	10.00	15.08	750	B30-R6000HF
	B33-75X10-7643-BK	Black	75.00	10.00	15.08	750	B30-R4400-WT
	B33-75X15-7643-BK	Black	75.00	15.00	20.02	500	B30-R4400-WT
	B33-75X25-7643-BK	Black	75.00	25.00	30.16	250	B30-R4400-WT
	B33-75X10-7643-BL	Blue	75.00	10.00	15.08	750	B30-R6000HF
	B33-75X15-7643-BL	Blue	75.00	15.00	20.02	500	B30-R6000HF
	B33-75X25-7643-BL	Blue	75.00	25.00	30.16	250	B30-R6000HF
	B33-75X10-7643-GN	Green	75.00	10.00	15.08	750	B30-R6000HF

>>



B-7643 Halogen-free cable tag (continued)

Easily print cable tags wherever you are

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
	B33-75X15-7643-GN	Green	75.00	15.00	20.02	500	B30-R6000HF
	B33-75X25-7643-GN	Green	75.00	25.00	30.16	250	B30-R6000HF
	B33-75X10-7643-OR	Orange	75.00	10.00	15.08	750	B30-R6000HF
	B33-75X15-7643-OR	Orange	75.00	15.00	20.02	500	B30-R6000HF
	B33-75X25-7643-OR	Orange	75.00	25.00	30.16	250	B30-R6000HF
	B33-75X10-7643-RD	Red	75.00	10.00	15.08	750	B30-R6000HF
	B33-75X15-7643-RD	Red	75.00	15.00	20.02	500	B30-R6000HF
	B33-75X25-7643-RD	Red	75.00	25.00	30.16	250	B30-R6000HF
	B33-75X10-7643-WT	White	75.00	10.00	15.08	750	B30-R6000HF
	B33-75X15-7643-WT	White	75.00	15.00	20.02	500	B30-R6000HF
	B33-75X25-7643-WT	White	75.00	25.00	30.16	250	B30-R6000HF
	B33-75X10-7643-YL	Yellow	75.00	10.00	15.08	750	B30-R6000HF
	B33-75X15-7643-YL	Yellow	75.00	15.00	20.02	500	B30-R6000HF
	B33-75X25-7643-YL	Yellow	75.00	25.00	30.16	250	B30-R6000HF



B-348 Mass transit cable tag

Fully compliant mass transit tag

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-348: Polyolefin							
	B33-6010-348-WT	White	60.00	10.00	15.08	750	B30-R6000HF
	B33-6010-348-YL	Yellow	60.00	10.00	15.08	750	B30-R6000HF
	B33-7510-348-WT	White	75.00	10.00	15.08	750	B30-R6000HF
	B33-7510-348-YL	Yellow	75.00	10.00	15.08	750	B30-R6000HF
	B33-7515-348-WT	White	75.00	15.00	20.02	500	B30-R6000HF
	B33-7515-348-YL	Yellow	75.00	15.00	20.02	500	B30-R6000HF
	B33-7525-348-WT	White	75.00	25.00	30.16	250	B30-R6000HF
	B33-7525-348-YL	Yellow	75.00	25.00	30.16	250	B30-R6000HF

How to read your PermaSleeve order reference

Example order reference:

B33D - 187 - 2 - BK - 4

Product | Diameter | Width | Colour | Pieces (Optional)

Order reference components PermaSleeve wire marking sleeves:

Product type

B33 = Single-sided Printing

B33D = Double-sided Printing

Sleeve width

2 = 50.80mm

Sleeve diameter

094 = 3⁄32" size fits wire diameter 0.58mm - 2.03mm
125 = 1⁄8" size fits wire diameter 1.17mm - 2.79mm
187 = 3⁄16" size fits wire diameter 1.57mm - 3.81mm
250 = 1⁄4" size fits wire diameter 2.39mm - 5.46mm
375 = 3⁄8" size fits wire diameter 3.18mm - 8.13mm
500 = 1⁄2" size fits wire diameter 4.75mm - 11.43mm
750 = 3⁄4" size fits wire diameter 6.35mm - 17.78mm
1000 = 1" size fits wire diameter 9.53mm - 24.13mm
1500 = 11⁄2" size fits wire diameter 12.7mm - 36.83mm

Sleeve Colour

BK = Black WT = White YL = Yellow

Optional: Pieces Per Sleeve

While 1 marker per sleeve is standard, the sleeve can be split into multiple pieces. Example: B33-1500-2-342-2 This "2 means that this 50.80mm sleeve is slit into two 25.40mm pieces

How to select a wire marker

There are four main questions to ask yourself when you're starting the process of marking wires. These questions will help you select a wire marker that best suits your needs.

1. Are you marking the wire after termination?

Sleeve markers can only be used before termination because they must be slipped over the open end of the wire. These non-adhesive markers provide flexibility as they can be moved prior to being heat-shrunk. Once shrunk, these markers fit snugly around wires for permanent identification which will stand up to harsh environments.

2. What size of wire are you marking?

The diameter of the wire determines the size of the sleeve or the height of the label to be used.

3. Will you print your own markers or purchase preprinted ones?

Pre-printed markers are available in a large variety of stock legends, and custom legends are available for any large jobs. These markers come in a variety of packaging and formats for ease of use and ease of transport. They are ideal for any application.
Printable markers are meant to be printed with variable legends as needed. Various methods for this include: portable wire marking printers or computer software linked to thermal transfer, dot matrix or laser-printers. An extensive array of sizes are available for every application. These printable markers offer the flexibility of printing legends on demand. They are also ideal for applications that require long legends.

4. In what type of environment will these wire markers be placed?

It is extremely important to select a wire marker material that will last for your application. Too many companies go to the trouble of marking only to have to do it all again because they did not select the correct material. Be sure to ask yourself these questions before you select your wire marker.

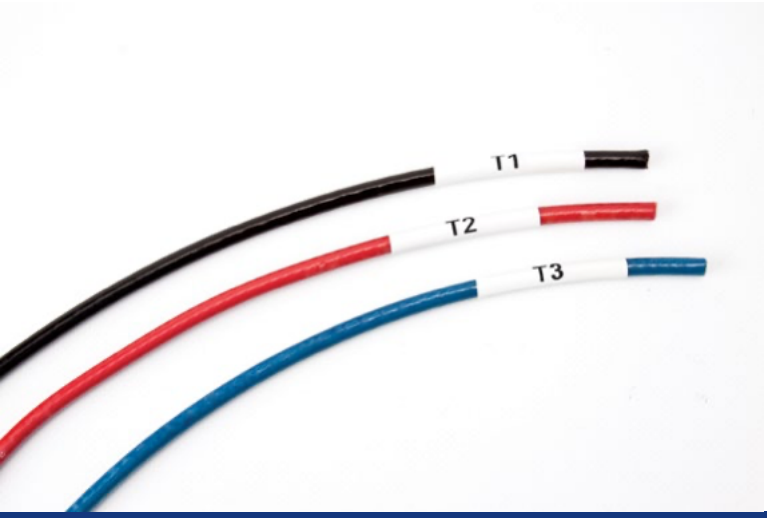

How to select a marker size

Brady offers a variety of marker sizes for your wire marking needs. Please view the chart listed below to assist you in choosing the minimum recommended flattened sleeve height for the wire or cable that you are identifying.

Sleeve code	Flattened Sleeve Height (mm)	Max. Wire/Cable Diameter (mm)	Min. Wire/Cable Diameter (mm)
B-342 PermaSleeve™ PS Polyolefin Wire Marking Sleeves			
094	4.62	2.03	0.58
125	5.97	2.79	1.17
187	8.51	3.81	1.57
250	11.15	5.46	2.39
375	16.38	8.13	3.18
500	21.62	11.43	4.75
750	31.75	17.78	6.35
1000	42.16	24.13	9.53
1500	61.80	36.83	12.70
B-345 PermaSleeve™ High Temperature PVDF Wire Marking Sleeves			
094	4.62	2.00	0.60
125	5.97	2.80	1.57
187	8.51	3.80	2.40
250	11.15	5.50	3.18
375	16.38	8.10	4.75
500	21.62	11.40	6.35
750	31.75	17.80	9.53
1000	42.16	24.10	11.40
1500	61.80	36.80	19.05
B-7641 PermaSleeve™ LSZH Low Smoke Zero Halogen Wire Marking Sleeves			
094	4.62	2.03	1.19
125	5.97	2.79	1.57
187	8.51	3.83	2.39
250	11.15	5.46	3.18
375	16.38	8.13	4.78
500	21.62	11.43	6.35
750	31.75	17.78	9.53
1000	42.16	24.13	12.70
1500	61.80	35.56	19.05
2000	80.39	48.26	25.40
B-7642 PermaSleeve™ Polyolefin Wire Marking Sleeves			
094	4.62	2.03	1.19
125	5.97	2.79	1.57
187	8.51	3.83	2.39
250	11.15	5.46	3.18
375	16.38	8.13	4.78
500	21.62	11.43	6.35
750	31.75	17.78	9.53
1000	42.16	24.13	12.70
1500	61.80	35.56	19.05
2000	80.39	48.26	25.40





B-342 PermaSleeve PS polyolefin wire marking sleeves

Standard military/industrial grade. 3:1 Shrink ratio

- A 3:1 heat shrinkable wire marker sleeve that fits snugly around wires
- Can be used for identification or wire protection
- Fade-resistant and flame-retardant

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-342: Heat-shrink Polyolefin							
V	B33-1000-2-342	White	50.80	42.16	50.80	250	B30-R4300
V	B33-1000-2-342YL	Yellow	50.80	42.16	50.80	250	B30-R4300
V	B33-125-2-342	White	50.80	5.97	12.70	1000	B30-R4300
V	B33-125-2-342-2	White	25.40	5.97	12.70	2000	B30-R4300
V	B33-125-2-342YL	Yellow	50.80	5.97	12.70	1000	B30-R4300
V	B33-125-2-342YL-2	Yellow	25.40	5.97	12.70	2000	B30-R4300
V	B33-1500-2-342	White	50.80	61.80	76.20	150	B30-R4300
V	B33-1500-2-342BK	Black	50.80	61.80	76.20	150	B30-R4500-SV
V	B33-1500-2-342YL	Yellow	50.80	61.80	76.20	150	B30-R4300
V	B33-1500-2-342YL-2	Yellow	25.40	61.80	76.20	300	B30-R4300
V	B33-187-2-342	White	50.80	8.51	15.88	750	B30-R4300
V	B33-187-2-342-2	White	25.40	8.51	15.88	1500	B30-R4300
V	B33-187-2-342YL	Yellow	50.80	8.51	15.88	750	B30-R4300
V	B33-250-2-342	White	50.80	11.15	19.05	500	B30-R4300
V	B33-250-2-342-2	White	25.40	11.15	19.05	1000	B30-R4300
V	B33-250-2-342YL	Yellow	50.80	11.15	19.05	500	B30-R4300
V	B33-375-2-342	White	50.80	16.38	25.40	500	B30-R4300
V	B33-375-2-342-2	White	25.40	16.38	25.40	1000	B30-R4300
V	B33-375-2-342YL	Yellow	50.80	16.38	25.40	500	B30-R4300
V	B33-500-2-342	White	50.80	21.62	31.75	350	B30-R4300
V	B33-500-2-342-2	White	25.40	21.62	31.75	700	B30-R4300
V	B33-500-2-342YL	Yellow	50.80	21.62	31.75	350	B30-R4300
V	B33-500-2-342YL-2	Yellow	25.40	21.62	31.75	700	B30-R4300
V	B33-750-2-342	White	50.80	31.75	41.28	250	B30-R4300
V	B33-750-2-342YL	Yellow	50.80	31.75	41.28	250	B30-R4300
V	B33-94-2-342	White	50.80	4.62	12.70	1000	B30-R4300
V	B33-94-2-342-2	White	25.40	4.62	12.70	2000	B30-R4300
V	B33-94-2-342YL	Yellow	50.80	4.62	12.70	1000	B30-R4300
V	B33-94-2-342YL-2	Yellow	25.40	4.62	12.70	2000	B30-R4300
V	B33D-1000-2-342BK	Black	50.80	42.16	50.80	250	B30-R4500-SV
V	B33D-1000-2-342YL	Yellow	50.80	42.16	50.80	250	B30-R4300
V	B33D-125-2-342	White	50.80	5.97	12.70	1000	B30-R4300
V	B33D-125-2-342BK	Black	50.80	5.97	12.70	1000	B30-R4500-SV
V	B33D-125-2-342YL	Yellow	50.80	5.97	12.70	1000	B30-R4300
V	B33D-1500-2-342	White	50.80	61.80	76.20	150	B30-R4300
V	B33D-1500-2-342BK	Black	50.80	61.80	76.20	150	B30-R4500-SV
V	B33D-1500-2-342YL	Yellow	50.80	61.80	76.20	150	B30-R4300
V	B33D-187-2-342	White	50.80	8.51	15.88	750	B30-R4300
V	B33D-187-2-342BK	Black	50.80	8.51	15.88	750	B30-R4500-SV
V	B33D-187-2-342YL	Yellow	50.80	8.51	15.88	750	B30-R4300
V	B33D-250-2-342	White	50.80	11.15	19.05	500	B30-R4300
V	B33D-250-2-342YL	Yellow	50.80	11.15	19.05	500	B30-R4300
V	B33D-375-2-342	White	50.80	16.38	25.40	500	B30-R4300
V	B33D-375-2-342YL	Yellow	50.80	16.38	25.40	500	B30-R4300
V	B33D-500-2-342	White	50.80	21.62	31.75	350	B30-R4300
V	B33D-500-2-342YL	Yellow	50.80	21.62	31.75	350	B30-R4300
V	B33D-750-2-342	White	50.80	31.75	41.28	250	B30-R4300
V	B33D-750-2-342BK	Black	50.80	31.75	41.28	250	B30-R4500-SV
V	B33D-750-2-342YL	Yellow	50.80	31.75	41.28	250	B30-R4300
V	B33D-94-2-342	White	50.80	4.62	12.70	1000	B30-R4300
V	B33D-94-2-342BK	Black	50.80	4.62	12.70	1000	B30-R4500-SV
V	B33D-94-2-342YL	Yellow	50.80	4.62	12.70	1000	B30-R4300

B-7641 PermaSleeve low smoke zero halogen wire marking sleeves

Permanent heat shrink wire identification

- A 2:1 double-sided printable heat-shrink Polyolefin wire marker sleeve designed for wire identification and insulation purposes
- Contains no added halogens, offers excellent flame retardant characteristics combined with minimal smoke emission



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7641: Heat-shrink Polyolefin							
V	B33D-1000-2-7641Y	Yellow	50.80	42.16	50.80	150	B30-R6600
V	B33D-125-2-7641	White	50.80	5.97	12.70	500	B30-R6600
V	B33D-125-2-7641Y	Yellow	50.80	5.97	12.70	500	B30-R6600
V	B33D-1500-2-7641	White	50.80	61.80	76.20	50	B30-R6600
V	B33D-1500-2-7641Y	Yellow	50.80	61.80	76.20	50	B30-R6600
V	B33D-187-2-7641	White	50.80	8.51	15.88	450	B30-R6600
V	B33D-187-2-7641Y	Yellow	50.80	8.51	15.88	450	B30-R6600
V	B33D-250-2-7641	White	50.80	11.15	19.05	400	B30-R6600
V	B33D-250-2-7641Y	Yellow	50.80	11.15	19.05	400	B30-R6600
V	B33D-375-2-7641	White	50.80	16.38	25.40	250	B30-R6600
V	B33D-375-2-7641Y	Yellow	50.80	16.38	25.40	250	B30-R6600
V	B33D-500-2-7641	White	50.80	21.62	31.75	225	B30-R6600
V	B33D-500-2-7641Y	Yellow	50.80	21.62	31.75	225	B30-R6600
V	B33D-750-2-7641Y	Yellow	50.80	31.75	41.28	150	B30-R6600
V	B33D-94-2-7641	White	50.80	4.62	12.70	500	B30-R6600

2-pass double-side sleeve printing with no wasted sleeves using i3300 printer and Brady Workstation

- Use double-sided sleeve module in Brady workstation
- Change text content, size and even rotation for each side!
- See a demo at Bradyeurope.com

QuickSleeve Handheld Sleeve Applicator (149474)



B-7642 PermaSleeve HX polyolefin wire marking sleeves

Military/Industrial grade. 2:1 Shrink ratio

- A 2:1 heat shrinkable wire marker sleeve that fits snugly around wires
- Flame-retardant and high-temp rated but not as high temp as B-345 “HT” Sleeves

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7642: Heat-shrink Polyolefin							
V	B33-94-2-7642	White	50.80	4.62	12.70	500	B30-R4300
V	B33-125-2-7642	White	50.80	5.97	12.70	500	B30-R4300
V	B33-187-2-7642	White	50.80	8.51	15.88	450	B30-R4300
V	B33-250-2-7642	White	50.80	11.15	19.05	400	B30-R4300
V	B33-1000-2-7642	White	50.80	42.16	50.80	150	B30-R4300
V	B33-1500-2-7642	White	50.80	61.80	76.20	50	B30-R4300
V	B33D-94-2-7642	White	50.80	4.62	12.70	500	B30-R4300
V	B33D-125-2-7642	White	50.80	5.97	12.70	500	B30-R4300
V	B33D-250-2-7642	White	50.80	11.15	19.05	400	B30-R4300
V	B33D-375-2-7642	White	50.80	16.38	25.40	250	B30-R4300
V	B33D-500-2-7642	White	50.80	21.62	31.75	225	B30-R4300
V	B33D-750-2-7642	White	50.80	31.75	41.28	150	B30-R4300
V	B33D-1000-2-7642	White	50.80	42.16	50.80	150	B30-R4300
V	B33D-1500-2-7642	White	50.80	61.80	76.20	50	B30-R4300



B-345 PermaSleeve HT high temperature PVDF wire marking sleeves

High temperature, low outgassing. 2:1 Shrink Ratio

- A 2:1 shrink ratio wire marker sleeve specifically designed for high temperature and low vacuum outgassing applications
- Made from irridated high-temp Polyvinyldine Fluoride (PVDF) heat shrink tubing
- Fade-resistant and flame-retardant

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-345: High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve							
V	B33D-125-2-345	White	50.80	5.97	12.70	1000	B30-R6000HF
V	B33D-187-2-345	White	50.80	8.51	15.88	750	B30-R6000HF
V	B33D-250-2-345	White	50.80	11.15	19.05	500	B30-R6000HF
V	B33D-375-2-345	White	50.80	16.38	25.40	500	B30-R6000HF
V	B33D-500-2-345	White	50.80	21.62	31.75	350	B30-R6000HF
V	B33D-750-2-345	White	50.80	31.75	41.28	250	B30-R6000HF
V	B33D-94-2-345	White	50.80	4.62	12.70	1000	B30-R6000HF

*This size is only 3:1 shrink ratio



B-7697 Rigid DuraSleeve wire marking inserts

DuraSleeve tag carriers are produced in transparent PVC. The special shape of the carrier allows it to adapt to cables of various diameters. There are several sizes of carriers which cater for cables with external diameters from 1.30 mm up to 15 mm.

- Temperature range: -40 °C to 60 °C
- Material: PVC

Please contact your local Brady representative to identify and select the most appropriate carrier for your individual application.

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7697: Polyester							
	B33-10x4.4-7697-WT	White	10.00	4.40	11.46	2500	B30-R4300, B30-R6200
	B33-12x4.4-7697-WT	White	12.00	4.40	11.46	2500	B30-R4300, B30-R6200
	B33-16x4.4-7697-WT	White	16.00	4.40	11.46	2500	B30-R4300, B30-R6200
	B33-23x4.4-7697-WT	White	23.00	4.40	11.46	2500	B30-R4300, B30-R6200
	B33-30x4.4-7697-WT	White	30.63	4.40	11.46	2500	B30-R4300, B30-R6200

Polyester labels

For general purpose industrial identification applications

- Widely used for PC board component identification, bin and shelf labels, barcoding and asset tracking
- 3 levels of adhesive strength











Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-422: Polyester								
⬢	B33-149-422	White	12.70	12.70	-	15.24	5000	B30-R6000HF
⬢	B33-5-422	White	25.40	12.70	-	15.24	5000	B30-R6000HF
▲	B33-102-422	White	38.10	9.40	-	12.70	2500	B30-R6000HF
⬢	B33-147-422	White	38.10	9.53	-	12.70	2500	B30-R6000HF
▲	B33-136-422	White	38.10	19.05	-	22.23	1500	B30-R6000HF
▲	B33-17-422	White	50.80	25.40	-	28.58	1500	B30-R6000HF
▲	B33-18-422	White	76.20	25.40	-	28.58	1500	B30-R6000HF
▲	B33-19-422	White	76.20	50.80	-	53.98	500	B30-R6000HF
▲	B33-76-422	White	101.60	76.20	-	79.38	500	B30-R6000HF
⊙	B33C-312-422	White	7.92	-	25.91	-	1	B30-R6000HF
⊙	B33C-375-422	White	9.53	-	25.91	-	1	B30-R6000HF
B-423: Polyester								
⬢	B33-11-423	White	6.35	6.35	-	9.53	15000	B30-R6000HF
⬢	B33-38-423	White	9.53	9.53	-	12.07	5000	B30-R6000HF
⬢	B33-340-423	White	9.53	9.53	-	12.07	10000	B30-R6000HF
⬢	B33-149-423	White	12.70	12.70	-	15.24	5000	B30-R6000HF
〓	B33-343-423	White	12.70	5.08	-	8.26	10000	B30-R6000HF
⬢	B33-1-423	White	19.05	6.35	-	8.89	5000	B30-R6000HF
▲	B33-46-423	White	19.05	6.35	-	8.89	5000	B30-R6000HF
▲	B33-49-423	White	22.86	6.35	-	8.89	5000	B30-R6000HF
▲	B33-103-423	White	25.40	6.35	-	8.89	5000	B30-R6000HF
⬢	B33-3-423	White	25.40	9.53	-	12.07	5000	B30-R6000HF
⬢	B33-5-423	White	25.40	12.70	-	15.24	5000	B30-R6000HF
⬢	B33-29-423	White	31.75	9.53	-	12.07	5000	B30-R6000HF
▲	B33-43-423	White	31.75	6.35	-	8.89	5000	B30-R6000HF
▲	B33-45-423	White	38.10	6.35	-	8.89	5000	B30-R6000HF
▲	B33-72-423	White	44.45	6.35	-	8.89	5000	B30-R6000HF
▲	B33-53-423	White	50.80	12.70	-	15.24	2500	B30-R6000HF
▲	B33-17-423	White	50.80	25.40	-	28.58	1500	B30-R6000HF
▲	B33-7-423	White	69.85	31.75	-	34.93	1000	B30-R6000HF
▲	B33-19-423	White	76.20	50.80	-	53.98	500	B30-R6000HF
▲	B33-18-423	White	76.20	25.40	-	28.58	1500	B30-R6000HF
▲	B33-20-423	White	76.20	127.00	-	130.18	350	B30-R6000HF
▲	B33-55-423	White	101.60	50.80	-	53.98	750	B30-R6000HF
▲	B33-76-423	White	101.60	76.20	-	79.38	500	B30-R6000HF
▲	B33-161-423	White	101.60	101.60	-	104.78	450	B30-R6000HF
▲	B33-25-423	White	101.60	152.40	-	155.58	300	B30-R6000HF
∞	B30C-2000-423	White	50.80	-	30.48	-	1	B30-R6000HF
∞	B30C-3000-423	White	76.20	-	30.48	-	1	B30-R6000HF
⊙	B30C-4000-423	White	101.60	-	45.72	-	1	B30-R6000HF
B-423/B-966B: Polyester with Polyester Overlaminate								
▲	B33-22-423	White	31.75	19.05	-	28.58	2000	B30-R6000HF
▲	B33-23-423	White	50.80	25.40	-	34.93	800	B30-R6000HF
▲	B33-24-423	White	69.85	44.45	-	53.98	500	B30-R6000HF
B-430: Polyester								
⬢	B33-5-430	Transparent	25.40	12.70	-	15.24	5000	B30-R6000HF
▲	B33-17-430	Transparent	50.80	25.40	-	28.58	1500	B30-R6000HF
▲	B33-18-430	Transparent	76.20	25.40	-	28.58	1500	B30-R6000HF
∞	B33C-3000-430	Transparent	76.20	-	30.48	-	1	B30-R6000HF
B-432: Polyester								
⬢	B33-149-432	Transparent	12.70	12.70	-	15.24	5000	B30-R6000HF
▲	B33-17-432	Transparent	50.80	25.40	-	28.58	1500	B30-R6000HF
▲	B33-18-432	Transparent	76.20	25.40	-	28.58	1500	B30-R6000HF
▲	B33-19-432	Transparent	76.20	50.80	-	53.98	500	B30-R6000HF
⊙	B30C-4000-432	Transparent	101.60	-	36.58	-	1	B30-R6000HF

>>







Polyester labels (continued)

For general purpose industrial identification applications

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-483A: Polyester								
⬢	B33-149-483	White	12.70	12.70	-	15.24	5000	B30-R6000HF
⬢	B33-5-483	White	25.40	12.70	-	15.24	5000	B30-R6000HF
▲	B33-17-483	White	50.80	25.40	-	28.58	1500	B30-R6000HF
▲	B33-7-483	White	69.85	31.75	-	34.93	1000	B30-R6000HF
▲	B33-19-483	White	76.20	50.80	-	53.98	500	B30-R6000HF
▲	B33-18-483	White	76.20	25.40	-	28.58	1500	B30-R6000HF
▲	B33-55-483	White	101.60	50.80	-	53.98	750	B30-R6000HF
▲	B33-76-483	White	101.60	76.20	-	79.38	500	B30-R6000HF
⊙	B30C-4000-483	White	101.60	-	39.62	-	1	B30-R6000HF
B-484A: Polyester								
▲	B33-125-484	White	22.86	12.70	-	15.24	1500	B30-R6000HF
⬢	B33-5-484	White	25.40	12.70	-	15.24	5000	B30-R6000HF
▲	B33-136-484	White	38.10	19.05	-	22.23	1500	B30-R6000HF
▲	B33-17-484	White	50.80	25.40	-	28.58	1500	B30-R6000HF
▲	B33-18-484	White	76.20	25.40	-	28.58	1500	B30-R6000HF
▲	B33-19-484	White	76.20	50.80	-	53.98	500	B30-R6000HF
⊙	B30C-4000-484	White	101.60	-	45.72	-	1	B30-R6000HF
B-488: Polyester								
⊙	B30C-4000-488	White	101.60	-	39.62	-	1	B30-R4300
B-489A: Polyester								
⬢	B33-5-489	White	25.40	12.70	-	15.24	5000	B30-R4300
▲	B33-17-489	White	50.80	25.40	-	28.58	1500	B30-R4300
▲	B33-19-489	White	76.20	50.80	-	53.98	500	B30-R4300
▲	B33-18-489	White	76.20	25.40	-	28.58	1500	B30-R4300
⊙	B30C-4000-489	White	101.60	-	39.62	-	1	B30-R4300
B-618: Polyester								
⬢	B33-12-618	White	12.70	11.10	-	13.67	10000	B30-R6000HF
⬢	B33-5-618	White	25.40	12.70	-	15.24	7000	B30-R6000HF
⬢	B33-37-618	White	38.10	12.70	-	15.24	5000	B30-R6000HF
⬢	B33-6-618	White	38.10	19.05	-	22.23	3300	B30-R6000HF
⬢	B33-53-618	White	50.80	12.70	-	15.24	2500	B30-R6000HF
⬢	B33-17-618	White	50.80	25.40	-	28.58	1500	B30-R6000HF
⬢	B33-7-618	White	69.85	31.75	-	34.93	1000	B30-R6000HF
⬢	B33-18-618	White	76.20	25.40	-	28.58	1500	B30-R6000HF
⬢	B33-19-618	White	76.20	50.80	-	53.98	700	B30-R6000HF
⬢	B33-55-618	White	101.60	50.80	-	53.98	750	B30-R6000HF
⬢	B33-76-618	White	101.60	76.20	-	79.38	500	B30-R6000HF
B-8423: Polyester								
⬢	B33-12-8423	White	12.70	11.10	-	14.13	2500	B30-R6000HF
⬢	B33-101-8423	White	19.05	6.35	-	9.40	2500	B30-R6000HF
⬢	B33-G2-8423YL	Yellow	20.00	7.95	-	15.00	5000	B30-R6000HF
⬢	B33-13-8423	White	31.75	6.35	-	9.35	2500	B30-R6000HF
⬢	B33-104-8423	White	38.10	6.35	-	9.33	2500	B30-R6000HF
⬢	B33-600-8423	White	38.10	19.05	-	22.05	2500	B30-R6000HF
B-8591: Polyester								
⬢	B33-37-8591-BK	Black	38.10	12.70	-	15.24	4000	B30-R4400-WT
⬢	B33-37-8591-SL	Silver	38.10	12.70	-	15.24	4000	B30-R6600
⬢	B33-37-8591-WT	White	38.10	12.70	-	15.24	4000	B30-R6600
⬢	B33-37-8591-YL	Yellow	38.10	12.70	-	15.24	4000	B30-R6600
▲	B33-53-8591-BK	Black	50.80	12.70	-	15.24	2500	B30-R4400-WT
▲	B33-53-8591-SL	Silver	50.80	12.70	-	15.24	2500	B30-R6600
▲	B33-53-8591-WT	White	50.80	12.70	-	15.24	2500	B30-R6600
▲	B33-53-8591-YL	Yellow	50.80	12.70	-	15.24	2500	B30-R6600
▲	B33-7-8591-BK	Black	69.85	31.75	-	34.93	1000	B30-R4400-WT
▲	B33-7-8591-SL	Silver	69.85	31.75	-	34.93	1000	B30-R6600
▲	B33-7-8591-WT	White	69.85	31.75	-	34.93	1000	B30-R6600
▲	B33-7-8591-YL	Yellow	69.85	31.75	-	34.93	1000	B30-R6600
⬢	B33-76-8591-BK	Black	101.60	76.20	-	79.38	400	B30-R4400-WT

>>

Polyester labels (continued)

For general purpose industrial identification applications







Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
⬢	B33-76-8591-SL	Silver	101.60	76.20	-	79.38	400	B30-R6600
⬢	B33-76-8591-WT	White	101.60	76.20	-	79.38	400	B30-R6600
⬢	B33-76-8591-YL	Yellow	101.60	76.20	-	79.38	400	B30-R6600
∞	B33C-2000-8591-BK	Black	50.80	-	30.48	-	1	B30-R4400-WT
∞	B33C-2000-8591-SL	Silver	50.80	-	30.48	-	1	B30-R6600
∞	B33C-2000-8591-WT	White	50.80	-	30.48	-	1	B30-R6600
∞	B33C-2000-8591-YL	Yellow	50.80	-	30.48	-	1	B30-R6600
∞	B33C-3000-8591-BK	Black	76.20	-	30.48	-	1	B30-R4400-WT
∞	B33C-3000-8591-SL	Silver	76.20	-	30.48	-	1	B30-R6600
∞	B33C-3000-8591-WT	White	76.20	-	30.48	-	1	B30-R6600
∞	B33C-3000-8591-YL	Yellow	76.20	-	30.48	-	1	B30-R6600
∞	B33C-4000-8591-BK	Black	101.60	-	30.48	-	1	B30-R4400-WT
∞	B33C-4000-8591-SL	Silver	101.60	-	30.48	-	1	B30-R6600
∞	B33C-4000-8591-WT	White	101.60	-	30.48	-	1	B30-R6600
∞	B33C-4000-8591-YL	Yellow	101.60	-	30.48	-	1	B30-R6600

Metallised polyester labels

For product labelling, asset tracking and general industrial identification

- Silver metallic label withstands solvents and variable temperatures
- Ideal for serial number plates and rating plates with nameplate quality and metal looking finish









Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-413: Metallic, Non-metal Polyester								
⬢	B33-5-413	Silver	25.40	12.70	-	15.24	7000	B30-R6000HF
⬢	B33-37-413	Silver	38.10	12.70	-	15.24	5000	B30-R6000HF
⬢	B33-6-413	Silver	38.10	19.05	-	22.23	3300	B30-R6000HF
▲	B33-17-413	Silver	50.80	25.40	-	28.58	1500	B30-R6000HF
▲	B33-53-413	Silver	50.80	12.70	-	15.24	2500	B30-R6000HF
▲	B33-7-413	Silver	69.85	31.75	-	34.93	1000	B30-R6000HF
▲	B33-18-413	Silver	76.20	25.40	-	28.58	1500	B30-R6000HF
▲	B33-19-413	Silver	76.20	50.80	-	53.98	700	B30-R6000HF
▲	B33-55-413	Silver	101.60	50.80	-	53.98	750	B30-R6000HF
∞	B33C-2000-413	Silver	50.80	-	30.48	-	1	B30-R6000HF
∞	B33C-3000-413	Silver	76.20	-	30.48	-	1	B30-R6000HF
∞	B33C-4000-413	Silver	101.60	-	30.48	-	1	B30-R6000HF
B-428: Metallised Polyester								
⬢	B33-616-428	Light Grey	22.86	19.05	-	22.05	3000	B30-R4300
⬢	B33-5-428	Light Grey	25.40	12.70	-	15.24	5000	B30-R4300
⬢	B33-37-428	Light Grey	38.10	12.70	-	15.24	4000	B30-R4300
⬢	B33-6-428	Light Grey	38.10	19.05	-	22.23	3000	B30-R4300
▲	B33-53-428	Light Grey	50.80	12.70	-	15.24	2500	B30-R4300
▲	B33-17-428	Light Grey	50.80	25.40	-	28.58	1500	B30-R4300
▲	B33-7-428	Light Grey	69.85	31.75	-	34.93	1000	B30-R4300
▲	B33-19-428	Light Grey	76.20	50.80	-	53.98	500	B30-R4300
▲	B33-18-428	Light Grey	76.20	25.40	-	28.58	1500	B30-R4300
▲	B33-55-428	Light Grey	101.60	50.80	-	53.98	500	B30-R4300
▲	B33-161-428	Light Grey	101.60	101.60	-	104.78	300	B30-R4300
∞	B30C-2000-428	Light Grey	50.80	-	30.48	-	1	B30-R4300
⊙	B30C-4000-428	Light Grey	101.60	-	39.62	-	1	B30-R4300
B-428/B-966B: Metallised Polyester with Polyester Overlaminate								
⬢	B33-22-428	Light Grey	31.75	19.05	-	28.58	1700	B30-R4300
▲	B33-23-428	Light Grey	50.80	25.40	-	34.93	700	B30-R4300
▲	B33-24-428	Light Grey	69.85	44.45	-	53.98	450	B30-R4300
B-434A: Metallised Polyester								
⬢	B33-5-434	Silver	25.40	12.70	-	15.24	5000	B30-R6000HF
▲	B33-136-434	Silver	38.10	19.05	-	22.23	1500	B30-R6000HF
⬢	B33-37-434	Silver	38.10	12.70	-	15.24	5000	B30-R6000HF
⬢	B33-6-434	Silver	38.10	19.05	-	22.23	3300	B30-R6000HF

>>









Metallised polyester labels (continued)

For product labelling, asset tracking and general industrial identification

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B33-17-434	Silver	50.80	25.40	-	28.58	1500	B30-R6000HF
▲	B33-53-434	Silver	50.80	12.70	-	15.24	2500	B30-R6000HF
▲	B33-7-434	Silver	69.85	31.75	-	34.93	1000	B30-R6000HF
▲	B33-18-434	Silver	76.20	25.40	-	28.58	1500	B30-R6000HF
▲	B33-19-434	Silver	76.20	50.80	-	53.98	500	B30-R6000HF
▲	B33-55-434	Silver	101.60	50.80	-	53.98	750	B30-R6000HF
▲	B33-161-434	Silver	101.60	101.60	-	104.78	350	B30-R6000HF
∞	B30C-2000-434	Silver	50.80	-	30.48	-	1	B30-R6000HF
∞	B30C-3000-434	Silver	76.20	-	30.48	-	1	B30-R6000HF
⊙	B30C-4000-434	Silver	101.60	-	39.62	-	1	B30-R6000HF
B-435A: Metallised Polyester								
⬢	B33-5-435	Silver	25.40	12.70	-	15.24	7000	B30-R6000HF
⬢	B33-37-435	Silver	38.10	12.70	-	15.24	5000	B30-R6000HF
⬢	B33-6-435	Silver	38.10	19.05	-	22.23	3300	B30-R6000HF
▲	B33-53-435	Silver	50.80	12.70	-	15.24	2500	B30-R6000HF
⬢	B33-17-435	Silver	50.80	25.40	-	28.58	1500	B30-R6000HF
▲	B33-7-435	Silver	69.85	31.75	-	34.93	1000	B30-R6000HF
▲	B33-18-435	Silver	76.20	25.40	-	28.58	1500	B30-R6000HF
▲	B33-19-435	Silver	76.20	50.80	-	53.98	500	B30-R6000HF
▲	B33-55-435	Silver	101.60	50.80	-	53.98	750	B30-R6000HF
⬢	B33-161-435	Silver	101.60	101.60	-	104.78	350	B30-R6000HF
∞	B33C-2000-435	Silver	50.80	-	30.48	-	1	B30-R6000HF
∞	B33C-3000-435	Silver	76.20	-	30.48	-	1	B30-R6000HF
B-438: Tamper-evident Metallised Polyester								
⬢	B33-5-438	Silver	25.40	12.70	-	15.24	7000	B30-R4300
⬢	B33-37-438	Silver	38.10	12.70	-	15.24	5000	B30-R4300
⬢	B33-6-438	Silver	38.10	19.05	-	22.23	3300	B30-R4300
▲	B30-17-438	Silver	50.80	25.40	-	28.58	1225	B30-R4300
⬢	B33-53-438	Silver	50.80	12.70	-	15.24	2500	B30-R4300
⬢	B33-7-438	Silver	69.85	31.75	-	34.93	1000	B30-R4300
▲	B30-18-438	Silver	76.20	25.40	-	31.75	1225	B30-R4300
▲	B30-222-438	Silver	76.20	50.80	-	57.15	650	B30-R4300
▲	B33-55-438	Silver	101.60	50.80	-	53.98	750	B30-R4300
▲	B33-76-438	Silver	101.60	76.20	-	79.38	500	B30-R4300
∞	B30C-3000-438	Silver	76.20	-	30.48	-	1	B30-R4300
B-480A: Metallic, Non-metal Polyester								
⊙	B30C-4000-480	Light Grey	101.60	-	35.05	-	1	B30-R6000HF
B-486B: Metallised Polyester								
▲	B33-59-486	Light Grey	25.40	12.70	-	15.24	2500	B30-R4300
▲	B33-53-486	Light Grey	50.80	12.70	-	15.24	2500	B30-R4300
▲	B33-17-486	Light Grey	50.80	25.40	-	28.58	1300	B30-R4300
▲	B33-7-486	Light Grey	69.85	31.75	-	34.93	1000	B30-R4300
▲	B33-19-486	Light Grey	76.20	50.80	-	53.98	500	B30-R4300
▲	B33-18-486	Light Grey	76.20	25.40	-	28.58	1300	B30-R4300
▲	B33-161-486	Light Grey	101.60	101.60	-	104.78	250	B30-R4300
⊙	B30C-4000-486	Light Grey	101.60	-	35.05	-	1	B30-R4300
B-565: Metallised Polyester								
∞	B30C-1125-565-SL	Silver	28.58	-	30.48	-	1	B30-R10000
∞	B30C-2250-565-SL	Silver	57.15	-	30.48	-	1	B30-R10000
∞	B30C-4000-565-SL	Silver	101.60	-	30.48	-	1	B30-R10000
B-7563: Metallised Polyester								
⬢	B33-600-7563	Silver	38.10	19.05	-	22.05	2500	B30-R6000HF
⬢	B30-135-7563	Silver	38.10	19.05	-	22.22	3154	B30-R6000HF
▲	B30-17-7563	Silver	50.80	25.40	-	28.58	1226	B30-R6000HF
▲	B30-7-7563	Silver	69.85	31.75	-	34.93	1003	B30-R6000HF
▲	B30-222-7563	Silver	76.20	50.80	-	57.15	649	B30-R6000HF

B-424 Paper labels

Economical choice for light duty general identification

- White finish and matt topcoat
- Excellent contrast and smear resistance for barcode printing

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-424: Paper								
▲	B33-53-424	White	50.80	12.70	-	15.24	2500	B30-R4300
▲	B33-17-424	White	50.80	25.40	-	28.58	1500	B30-R4300
▲	B33-7-424	White	69.85	31.75	-	34.93	1000	B30-R4300
▲	B33-20-424	White	76.20	127.00	-	130.18	250	B30-R4300
▲	B33-19-424	White	76.20	50.80	-	53.98	500	B30-R4300
▲	B33-18-424	White	76.20	25.40	-	28.58	1500	B30-R4300
▲	B33-55-424	White	101.60	50.80	-	53.98	750	B30-R4300
▲	B33-25-424	White	101.60	152.40	-	155.58	350	B30-R4300
⊙	B30C-4000-424	White	101.60	-	45.72	-	1	B30-R4300





B-425 Polypropylene labels

General labelling material for indoor use

- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use (use B-595 indoor/outdoor vinyl for 8-10 year outdoor use)

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-425A: Polypropylene							
⬢	B33-5-425	White	25.40	12.70	15.24	5000	B30-R4300
▲	B33-17-425	White	50.80	25.40	28.58	1500	B30-R4300
▲	B33-18-425	White	76.20	25.40	28.58	1500	B30-R4300
▲	B33-19-425	White	76.20	50.80	53.98	500	B30-R4300





B-439 General identification vinyl labels

High Adhesion

- Designed for use in ambient conditions with limited solvent exposure
- Indoor/outdoor vinyl film has an acrylic pressure sensitive adhesive
- Service temperature of -70 to 40° C
- Available in many different colours as a custom option

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-439: Vinyl							
⬢	B33-5-439	White	25.40	12.70	15.24	7000	B30-R6000HF
▲	B33-37-439	White	38.10	12.70	15.24	5000	B30-R6000HF
▲	B33-17-439	White	50.80	25.40	28.58	1000	B30-R6000HF
▲	B33-53-439	White	50.80	12.70	15.24	2500	B30-R6000HF
▲	B33-18-439	White	76.20	25.40	28.58	1000	B30-R6000HF
▲	B33-19-439	White	76.20	50.80	53.98	700	B30-R6000HF
▲	B33-55-439	White	101.60	50.80	53.98	700	B30-R6000HF
▲	B33-76-439	White	101.60	76.20	79.38	500	B30-R6000HF





B-595 Outdoor grade vinyl labels

For 8-10 year outdoor use

- Semi-gloss finish
- Good chemical, moisture, UV and weather resistance
- Highly pliable material conforms to rough and curved surfaces and equipment
- Average outdoor durability of the label is 8-10 years depending on the placement

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-595: Vinyl							
▲	B30-242-595-BLNKWT	White	28.58	72.39	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT	White	76.20	57.15	82.55	300	B30-R10000
▲	B30-241-595-BLNKYL	Yellow	76.20	57.15	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT	White	97.79	57.15	107.95	250	B30-R10000
▲	B30-25-595-BLNKWT	White	152.40	101.60	158.75	175	B30-R10000
▲	B30-25-595-BLNKYL	Yellow	152.40	101.60	158.75	175	B30-R10000







B-719, B-767 and B-768 Static dissipative polyimide labels

For printed circuit board and electronic component identification

- Static dissipative adhesive and release liner with surface resistivity values
- Complies with EIA-541 Packaging Material Standards for ESD sensitive items
- Withstands the various processes, fluxes and cleaning solvents encountered in the manufacture of PC Boards
- For use on top or bottom-sided component identification or board identification

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-719: Polyimide							
⬢	B33-70-719	White	6.35	6.35	8.89	20000	B30-R6000HF
⬢	B33-38-719	White	9.53	9.53	12.07	5000	B30-R6000HF
⬢	B33-340-719	White	9.53	9.53	12.07	10000	B30-R6000HF
⬢	B33-12-719	White	12.70	11.10	13.64	10000	B30-R6000HF
⬢	B33-341-719	White	16.51	5.08	8.26	10000	B30-R6000HF
▲	B33-46-719	White	19.05	6.35	8.89	5000	B30-R6000HF
⬢	B33-1-719	White	19.05	6.35	8.89	10000	B30-R6000HF
⬢	B33-2-719	White	22.86	6.35	8.89	5000	B30-R6000HF
⬢	B33-51-719	White	25.40	6.35	8.89	10000	B30-R6000HF
▲	B33-103-719	White	25.40	6.35	8.89	4000	B30-R6000HF
⬢	B33-5-719	White	25.40	12.70	15.24	7000	B30-R6000HF
▲	B33-43-719	White	31.75	6.35	8.89	5000	B30-R6000HF
⬢	B33-13-719	White	31.75	6.35	9.53	7000	B30-R6000HF
⬢	B33-4-719	White	38.10	6.35	8.89	8000	B30-R6000HF
B-767: Static Dissipative Polyimide							
⬢	B33-70-767	White	6.35	6.35	8.89	20000	B30-R6300
⬢	B33-340-767	White	9.53	9.53	12.07	10000	B30-R6300
⬢	B33-12-767	White	12.70	11.10	13.64	10000	B30-R6300
⬢	B33-341-767	White	16.51	5.08	8.26	10000	B30-R6300
⬢	B33-1-767	White	19.05	6.35	8.89	10000	B30-R6300
▲	B33-46-767	White	19.05	6.35	8.89	5000	B30-R6300
⬢	B33-2-767	White	22.86	6.35	8.89	10000	B30-R6300
⬢	B33-51-767	White	25.40	6.35	8.89	10000	B30-R6300
▲	B33-103-767	White	25.40	6.35	8.89	5000	B30-R6300
⬢	B33-13-767	White	31.75	6.35	9.53	7000	B30-R6300
▲	B33-43-767	White	31.75	6.35	8.89	5000	B30-R6300
▲	B33-45-767	White	38.10	6.35	8.89	5000	B30-R6300
⬢	B33-4-767	White	38.10	6.35	8.89	8000	B30-R6300
B-768: Static Dissipative Polyimide							
⬢	B33-11-768	White	6.35	6.35	9.53	15000	B30-R6300
⬢	B33-340-768	White	9.53	9.53	12.07	10000	B30-R6300
⬢	B33-12-768	White	12.70	11.10	13.64	10000	B30-R6300
⬢	B33-341-768	White	16.51	5.08	8.26	10000	B30-R6300
⬢	B33-1-768	White	19.05	6.35	8.89	5000	B30-R6300
▲	B33-46-768	White	19.05	6.35	8.89	5000	B30-R6300
⬢	B33-2-768	White	22.86	6.35	8.89	10000	B30-R6300
▲	B33-49-768	White	22.86	6.35	8.89	5000	B30-R6300
⬢	B33-51-768	White	25.40	6.35	8.89	10000	B30-R6300
▲	B33-103-768	White	25.40	6.35	8.89	4000	B30-R6300
⬢	B33-5-768	White	25.40	12.70	15.24	10000	B30-R6300
⬢	B33-13-768	White	31.75	6.35	9.53	7000	B30-R6300
⬢	B33-4-768	White	38.10	6.35	8.89	8000	B30-R6300
▲	B33-45-768	White	38.10	6.35	8.89	5000	B30-R6300
▲	B33-72-768	White	44.45	6.35	8.89	5000	B30-R6300
▲	B33-15-768	White	50.80	6.35	9.53	3200	B30-R6300

B-8423 Polyester labels

For circuit board and component identification

- SMT - Top/Bottom;Through Hole - Bottom;Through Hole - Top

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-8423: Polyester							
⬢	B33-12-8423	White	12.70	11.10	14.13	2500	B30-R6000HF
⬢	B33-101-8423	White	19.05	6.35	9.40	2500	B30-R6000HF
⬢	B33-G2-8423YL	Yellow	20.00	7.95	15.00	5000	B30-R6000HF
⬢	B33-13-8423	White	31.75	6.35	9.35	2500	B30-R6000HF
⬢	B33-104-8423	White	38.10	6.35	9.33	2500	B30-R6000HF



B-724, B-728, B-729, B-777 and B-797 Standard polyimide labels

For circuit board labels and high-temperature general identification applications

- Withstands the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards
- For use on top bottom-side component identification or board identification
- 2 temperature levels to meet your needs

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-724: Polyimide								
⬢	B33-340-724	Amber	9.53	9.53	-	12.07	10000	B30-R4300
▲	B33-344-724	Amber	12.70	5.08	-	8.26	3700	B30-R4300
⬢	B33-12-724	Amber	12.70	11.10	-	13.64	10000	B30-R4300
⬢	B33-341-724	Amber	16.51	5.08	-	8.26	10000	B30-R4300
▲	B33-342-724	Amber	16.51	5.08	-	8.26	3700	B30-R4300
⬢	B33-1-724	Amber	19.05	6.35	-	8.89	5000	B30-R4300
▲	B33-46-724	Amber	19.05	6.35	-	8.89	5000	B30-R4300
⬢	B33-2-724	Amber	22.86	6.35	-	8.89	5000	B30-R4300
⬢	B33-51-724	Amber	25.40	6.35	-	8.89	10000	B30-R4300
▲	B33-103-724	Amber	25.40	6.35	-	8.89	4000	B30-R4300
⬢	B33-5-724	Amber	25.40	12.70	-	15.24	7000	B30-R4300
⬢	B33-13-724	Amber	31.75	6.35	-	9.53	7000	B30-R4300
⬢	B33-4-724	Amber	38.10	6.35	-	8.89	5000	B30-R4300
⦿	B30C-4000-724	Amber	101.60	-	39.62	-	1	B30-R4300
B-728: Polyimide								
⬢	B33-70-728	White	6.35	6.35	-	8.89	20000	B30-R6000HF
⬢	B33-340-728	White	9.53	9.53	-	12.07	10000	B30-R6000HF
⬢	B33-12-728	White	12.70	11.10	-	13.64	10000	B30-R6000HF
⬢	B33-341-728	White	16.51	5.08	-	8.26	10000	B30-R6000HF
⬢	B33-1-728	White	19.05	6.35	-	8.89	10000	B30-R6000HF
⬢	B33-2-728	White	22.86	6.35	-	8.89	10000	B30-R6000HF
⬢	B33-5-728	White	25.40	12.70	-	15.24	7000	B30-R6000HF
⬢	B33-51-728	White	25.40	6.35	-	8.89	10000	B30-R6000HF
▲	B33-103-728	White	25.40	6.35	-	8.89	4000	B30-R6000HF
⬢	B33-13-728	White	31.75	6.35	-	9.53	7000	B30-R6000HF
▲	B33-43-728	White	31.75	6.35	-	8.89	4000	B30-R6000HF
⬢	B33-4-728	White	38.10	6.35	-	8.89	8000	B30-R6000HF





>>







B-724, B-728, B-729, B-777 and B-797 Standard polyimide labels (continued)

For circuit board labels and high-temperature general identification applications

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-729: Polyimide								
⬢	B33-70-729	White	6.35	6.35	-	8.89	20000	B30-R6000HF
⬢	B33-340-729	White	9.53	9.53	-	12.07	10000	B30-R6000HF
⬢	B33-12-729	White	12.70	11.10	-	13.64	10000	B30-R6000HF
⬢	B33-341-729	White	16.51	5.08	-	8.26	10000	B30-R6000HF
⬢	B33-1-729	White	19.05	6.35	-	8.89	10000	B30-R6000HF
⬢	B33-2-729	White	22.86	6.35	-	8.89	10000	B30-R6000HF
⬢	B33-5-729	White	25.40	12.70	-	15.24	7000	B30-R6000HF
⬢	B33-51-729	White	25.40	6.35	-	8.89	10000	B30-R6000HF
▲	B33-103-729	White	25.40	6.35	-	8.89	4000	B30-R6000HF
⬢	B33-13-729	White	31.75	6.35	-	9.53	7000	B30-R6000HF
▲	B33-43-729	White	31.75	6.35	-	8.89	4000	B30-R6000HF
⬢	B33-4-729	White	38.10	6.35	-	8.89	8000	B30-R6000HF
B-777: Polyimide								
⬢	B33-340-777	White	9.53	9.53	-	12.07	10000	B30-R6300
⬢	B33-341-777	White	16.51	5.08	-	8.26	10000	B30-R6300
⬢	B33-1-777	White	19.05	6.35	-	8.89	10000	B30-R6300
⬢	B33-2-777	White	22.86	6.35	-	8.89	10000	B30-R6300
⬢	B33-51-777	White	25.40	6.35	-	8.89	10000	B30-R6300
⬢	B33-103-777	White	25.40	6.35	-	8.89	4000	B30-R6300
⬢	B33-13-777	White	31.75	6.35	-	9.53	7000	B30-R6300
⬢	B33-43-777	White	31.75	6.35	-	8.89	4000	B30-R6300
⬢	B33-4-777	White	38.10	6.35	-	8.89	8000	B30-R6300
B-797: Polyimide								
⬢	B33-70-797	White	6.35	6.35	-	8.89	20000	B30-R6300
⬢	B33-11-797	White	6.35	6.35	-	9.53	5000	B30-R6300
⬢	B33-71-797	White	8.00	8.00	-	11.43	20000	B30-R6300
⬢	B33-340-797	White	9.53	9.53	-	12.07	10000	B30-R6300
⬢	B33-12-797	White	12.70	11.10	-	13.64	10000	B30-R6300
⬢	B33-341-797	White	16.51	5.08	-	8.26	10000	B30-R6300
⬢	B33-342-797	White	16.51	5.08	-	8.26	3700	B30-R6300
⬢	B33-1-797	White	19.05	6.35	-	8.89	5000	B30-R6300
▲	B33-49-797	White	22.86	6.35	-	8.89	5000	B30-R6300
⬢	B33-2-797	White	22.86	6.35	-	8.89	5000	B30-R6300
⬢	B33-51-797	White	25.40	6.35	-	8.89	10000	B30-R6300
⬢	B33-3-797	White	25.40	9.53	-	12.07	20000	B30-R6300
⬢	B33-5-797	White	25.40	12.70	-	15.24	7000	B30-R6300
▲	B33-103-797	White	25.40	6.35	-	8.89	5000	B30-R6300
▲	B33-58-797	White	25.40	9.53	-	12.07	4000	B30-R6300
▲	B33-59-797	White	25.40	12.70	-	15.24	2500	B30-R6300
⬢	B33-13-797	White	31.75	6.35	-	9.53	5000	B30-R6300
▲	B33-43-797	White	31.75	6.35	-	8.89	5000	B30-R6300
▲	B33-44-797	White	34.93	6.35	-	8.89	5000	B30-R6300
▲	B33-45-797	White	38.10	6.35	-	8.89	5000	B30-R6300
⬢	B33-4-797	White	38.10	6.35	-	8.89	10000	B30-R6300
▲	B33-72-797	White	44.45	6.35	-	8.89	5000	B30-R6300
▲	B33-15-797	White	50.80	6.35	-	9.53	3200	B30-R6300
⊙	B30C-4000-797	White	101.60	-	39.62	-	1	B30-R6300

B-461, B-490, B-492, B-498 & B-499 Vial & tube labels

Always have clear, legible specimen samples

- Labels are designed to withstand extreme laboratory environments.
- Resistant to laboratory solvents like Xylene, ethanol, alcohol and DMSO.
- Identification is always legible – and will not smear, fade or fall off.
- B-490, can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself.
- B-492, can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen.

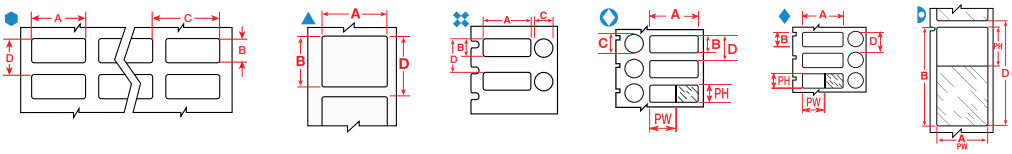

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
0.5 - 0.7 mL									
⬢	B-498	F R	12.70	19.05	-	-	B33-68-498	B30-R6200	5000
0.5 mL									
⬢	B-499	F N A	12.70	19.05	-	-	B33-68-499	B30-R4300	1500
⬢	B-490	F N H L	12.70	19.05	-	-	B33-68-490	B30-R4300	2500
▲	B-499	F N A	12.70	25.40	-	-	B33-620-499	B30-R6000HF	1000
⬢	B-499	F N A	12.70	25.40	-	-	B33-611-499	B30-R6000HF	3000
✖	B-499	F A	22.86	12.70	-	-	B33-126-499	B30-R4300	1500
✖	B-490	F H L	22.86	12.70	-	-	B33-126-490	B30-R4300	2500
▲	B-499	F A	22.86	12.70	-	-	B33-125-499	B30-R4300	1500
▲	B-490	F N H L	22.86	12.70	-	-	B33-125-490	B30-R4300	1650
✖	B-499	F A	25.40	9.53	-	-	B33-163-499	B30-R4300	1500
✖	B-492	F H L	25.40	9.53	-	-	B33-163-492	B30-R6400	1500
⬢	B-499	F N A	25.40	9.53	-	-	B33-152-499	B30-R4300	1500
⬢	B-492	F N H L	25.40	9.53	-	-	B33-152-492	B30-R6400	2500
◆	B-461	F A H S L	25.40	9.53	25.40	9.53	B33-606-461	B30-R4300	1000
▲	B-499	F N A	25.40	12.45	-	-	B33-659-499	B30-R6000HF	1000
✖	B-492	F H L	25.40	12.70	-	-	B33-182-492	B30-R6400	1500
✖	B-492	F H L	25.40	12.70	-	-	B33-181-492	B30-R6400	1500
▲	B-492	F N H L	25.40	12.70	-	-	B33-59-492	B30-R6400	2500
⬢	B-499	F N A	25.40	12.70	-	-	B33-5-499	B30-R6000HF	5000
⬮	B-461	F N A H S L	55.88	12.70	19.05	12.70	B33-127-461	B30-R4300	1500
1.0 - 8.0 mL									
⬢	B-498	F R	19.05	23.80	-	-	B33-91-498	B30-R6200	2500
⬢	B-498	F R	25.40	19.05	-	-	B33-88-498	B30-R6200	2500
1.5 mL									
⬢	B-499	F N A	19.05	6.35	-	-	B33-1-499	B30-R6000HF	10000
▲	B-499	F N A	19.05	19.05	-	-	B33-254-499	B30-R6000HF	1000
⬢	B-499	F N A	19.05	23.80	-	-	B33-91-499	B30-R6000HF	2500
⬢	B-499	F N A	25.40	19.05	-	-	B33-88-499	B30-R6000HF	2500
⬮	B-461	F N A H S L	66.68	15.24	25.40	15.24	B33-153-461	B30-R4300	1500
2.0 mL									
⬢	B-499	F N A	6.35	36.50	-	-	B33-90-499	B30-R6000HF	2500
⬮	B-461	F N A H S L	15.24	38.10	15.24	33.02	B33-628-461	B30-R4300	2500
⬮	B-461	F N A H S L	15.24	66.68	15.24	25.40	B33-612-461	B30-R4300	1500
▲	B-492	F N H L	22.86	25.40	-	-	B33-180-492	B30-R6400	1500
▲	B-492	F N H L	25.40	25.40	-	-	B33-179-492	B30-R6400	1900
⬮	B-461	F N A H S L	44.45	25.40	25.40	25.40	B33-183-461	B30-R4300	2000
4.0 mL									
⬢	B-499	F N A	12.70	36.50	-	-	B33-87-499	B30-R6000HF	2500
⬮	B-461	F N A H S L	15.24	48.26	15.24	39.88	B33-638-461	B30-R4300	2000

>>

F Freezer environment N Liquid nitrogen environment A Autoclave environment H Hot water bath (100°C) S Self-laminating label L Low-profile (extremely thin) label R Removable

B-461, B-490, B-492, B-498 & B-499 Vial & tube labels (continued)

Always have clear, legible specimen samples

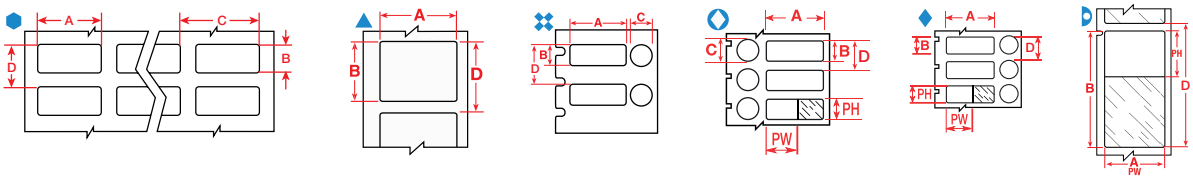

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
0.5 - 0.7 mL									
	B-499	F N A	25.40	36.50	-	-	B33-621-499	B30-R6000HF	3000
	B-499	F N A	25.40	36.50	-	-	B33-89-499	B30-R6000HF	2300
	B-461	F N A H S L	34.93	45.72	34.93	39.88	B33-632-461	B30-R4300	1500
	B-492	F H L	41.28	15.24	-	-	B33-190-492	B30-R6400	1500
	B-492	F N H L	41.28	15.24	-	-	B33-155-492	B30-R6400	1500
	B-490	F N H L	41.28	15.24	-	-	B33-155-490	B30-R4300	1500
	B-461	F N A H S L	41.28	15.24	25.40	15.24	B33-133-461	B30-R4300	1500
	B-461	F A H S L	41.28	15.24	41.28	15.24	B33-608-461	B30-R4300	1000
	B-490	F N H L	50.80	6.35	-	-	B33-151-490	B30-R4300	2500
	B-461	F N A H S L	66.68	25.40	25.40	25.40	B33-276-461	B30-R4300	1500
	B-461	F N A H S L	88.90	38.10	31.75	38.10	B33-134-461	B30-R4300	1000
8.0 mL									
	B-499	F N A	25.40	66.68	-	-	B33-625-499	B30-R6000HF	1500
	B-492	F N H L	48.26	25.40	-	-	B33-156-492	B30-R6400	1500
	B-490	F N H L	48.26	25.40	-	-	B33-156-490	B30-R4300	1500
12.0 - 24.0 mL									
	B-498	F R	12.70	36.50	-	-	B33-87-498	B30-R6200	2500
12.0 - 50.0 mL									
	B-498	F R	25.40	101.60	-	-	B33-326-498	B30-R6200	450
15.0 - 50.0 mL									
	B-498	F R	25.40	36.50	-	-	B33-89-498	B30-R6200	2300
15.0 mL									
	B-490	F N H L	55.88	38.10	-	-	B33-157-490	B30-R4300	1000
	B-461	F N A H S L	133.35	25.40	38.10	25.40	B33-139-461	B30-R4300	650
25.0 mL									
	B-499	F N A	25.40	63.50	-	-	B33-325-499	B30-R6000HF	700
50.0 mL									
	B-498	F R	19.05	19.05	-	-	B33-254-498	B30-R6200	1000
	B-498	F R	25.40	12.70	-	-	B33-5-498	B30-R6200	5000
	B-498	F R	25.40	63.50	-	-	B33-325-498	B30-R6200	700
	B-499	F N A	25.40	101.60	-	-	B33-326-499	B30-R6000HF	450
	B-499	F N A	38.10	101.60	-	-	B33-327-499	B30-R6000HF	450
	B-498	F R	38.10	101.60	-	-	B33-327-498	B30-R6200	450
	B-499	F N A	38.10	152.40	-	-	B33-328-499	B30-R6000HF	300
	B-498	F R	38.10	152.40	-	-	B33-328-498	B30-R6200	300

F Freezer environment N Liquid nitrogen environment A Autoclave environment H Hot water bath (100°C) S Self-laminating label L Low-profile (extremely thin) label R Removable

B-461, B-490 & B-492 Centrifuge, eppendorf & PCR tube labels

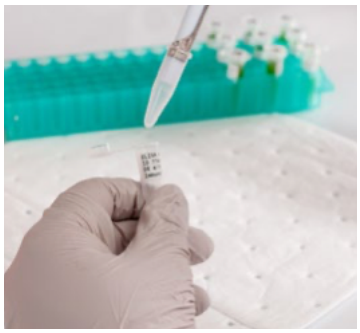

Stays put in harsh conditions and resist common laboratory chemicals

- Thin construction that prevents jamming in centrifuges and racks
- Long and short tails styles provide window for viewing liquids level in tube
- B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen

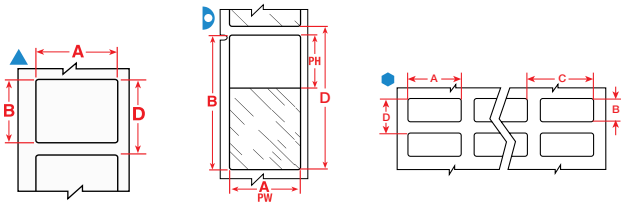

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
0.5 mL									
	B-461	F N A H S L	5.08	22.86	5.08	18.29	B33-614-461	B30-R4300	2000
	B-461	F N A H S L	6.35	27.94	6.35	22.09	B33-627-461	B30-R4300	1000
	B-490	F N H L	12.70	19.05	-	-	B33-68-490	B30-R4300	2500
	B-492	F N H L	25.40	9.53	-	-	B33-152-492	B30-R6400	2500
	B-461	F N A H S L	45.72	12.70	19.05	12.70	B33-122-461	B30-R4300	1500
	B-461	F N A H S L	55.88	12.70	19.05	12.70	B33-127-461	B30-R4300	1500
1.5 mL									
	B-490	F N H L	31.75	9.53	-	-	B33-154-490	B30-R4300	1500
	B-461	F N A H S L	45.72	9.53	19.05	9.53	B33-123-461	B30-R4300	1500
	B-461	F N A H S L	66.68	15.24	25.40	15.24	B33-153-461	B30-R4300	1500
4.0 mL									
	B-492	F N H L	41.28	15.24	-	-	B33-155-492	B30-R6400	1500
	B-490	F N H L	41.28	15.24	-	-	B33-155-490	B30-R4300	1500

B-461, B-490, B-492 & B-499 Conical / Large tube labels

Use these labels for labelling larger tube sizes, while still providing the needed temperature and chemical resistance properties

- B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen

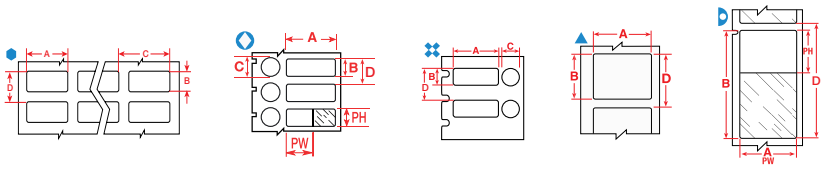

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
0.5 mL										
	B-499	F A	12.70	19.05	-	-	-	B33-68-499	B30-R4300	1500
	B-499	F A	12.70	25.40	-	-	-	B33-620-499	B30-R6000HF	1000
	B-499	F H	22.86	12.70	-	-	-	B33-125-499	B30-R4300	1500
	B-499	F A	22.86	12.70	12.70	-	-	B33-126-499	B30-R4300	1500
	B-499	F A	25.40	9.53	-	-	-	B33-152-499	B30-R4300	1500
	B-492	F H L	25.40	9.53	-	-	-	B33-152-492	B30-R6400	2500
	B-492	F H L	25.40	12.70	-	-	-	B33-59-492	B30-R6400	2500
	B-499	F A	25.40	12.70	-	-	-	B33-5-499	B30-R6000HF	5000
	B-461	F A H S L	55.88	12.70	-	19.05	12.70	B33-127-461	B30-R4300	1500

*AW = All white / no transparent area

>>

F Freezer environment N Liquid nitrogen environment A Autoclave environment H Hot water bath (100°C) S Self-laminating label L Low-profile (extremely thin) label R Removable

B-461, B-490, B-492 & B-499 Conical / Large tube labels (continued)

Use these labels for labelling larger tube sizes, while still providing the needed temperature and chemical resistance properties



Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
1.5 mL										
▲	B-499	F A	19.05	19.05	-	-	-	B33-254-499	B30-R6000HF	1000
⬢	B-499	F A	19.05	23.80	-	-	-	B33-91-499	B30-R6000HF	2500
⬢	B-499	F A	25.40	19.05	-	-	-	B33-88-499	B30-R6000HF	2500
2.0 mL										
◗	B-461	F A H S L	15.24	38.10	-	15.24	33.02	B33-628-461	B30-R4300	2500
◗	B-461	F A H S L	15.24	66.68	-	15.24	25.40	B33-612-461	B30-R4300	1500
◗	B-461	F A H S L	19.05	38.10	-	19.05	33.02	B33-629-461	B30-R4300	2500
▲	B-492	F H L	25.40	25.40	-	-	-	B33-179-492	B30-R6400	1900
4.0 mL										
⬢	B-499	F A	12.70	36.50	-	-	-	B33-87-499	B30-R6000HF	2500
◗	B-461	F A H S L	15.24	48.26	-	15.24	39.88	B33-638-461	B30-R4300	2000
⬢	B-499	F A	20.32	36.50	-	-	-	B33-165-499	B30-R4300	2500
⬢	B-499	F A	25.40	36.50	-	-	-	B33-621-499	B30-R6000HF	3000
⬢	B-499	F A	25.40	36.50	-	-	-	B33-89-499	B30-R6000HF	2300
◗	B-461	F A H S L	34.93	45.72	-	34.93	39.88	B33-632-461	B30-R4300	1500
▲	B-499	F A	38.10	19.05	-	-	-	B33-136-499	B30-R4300	1500
▲	B-492	F H L	41.28	15.24	-	-	-	B33-155-492	B30-R6400	1500
▲	B-490	F H L	41.28	15.24	-	-	-	B33-155-490	B30-R4300	1500
◗	B-461	F A H S L	41.28	15.24	-	25.40	15.24	B33-133-461	B30-R4300	1500
✖	B-492	F H L	41.28	15.24	9.53	-	-	B33-190-492	B30-R6400	1500
◇	B-461	F A H S L	41.28	15.24	12.70	41.28	15.24	B33-608-461	B30-R4300	1000
▲	B-490	F H L	50.80	6.35	-	-	-	B33-151-490	B30-R4300	2500
◗	B-461	F A H S L	66.68	25.40	-	25.40	25.40	B33-276-461	B30-R4300	1500
◗	B-461	F A H S L	88.90	38.10	-	31.75	38.10	B33-134-461	B30-R4300	1000
8.0 mL										
⬢	B-499	F A	25.40	66.68	-	-	-	B33-625-499	B30-R6000HF	1500
▲	B-492	F H L	48.26	25.40	-	-	-	B33-156-492	B30-R6400	1500
▲	B-461	F A H L	48.26	25.40	-	48.26	-	B33-636-461AW	B30-R4300	2000
▲	B-499	F A	50.80	25.40	-	-	-	B33-137-499	B30-R4300	1100
15.0 mL										
◗	B-461	F A H S L	133.35	25.40	-	38.10	25.40	B33-139-461	B30-R4300	650
25.0 mL										
⬢	B-499	F A	25.40	63.50	-	-	-	B33-325-499	B30-R6000HF	700
▲	B-461	F A H L	57.15	19.05	-	57.15	-	B33-642-461AW	B30-R4300	2000
▲	B-461	F A H L	88.90	38.10	-	88.90	-	B33-650-461AW	B30-R4300	2000
50.0 mL										
⬢	B-499	F A	25.40	101.60	-	-	-	B33-326-499	B30-R6000HF	450
⬢	B-499	F A	38.10	101.60	-	-	-	B33-327-499	B30-R6000HF	450
⬢	B-499	F A	38.10	152.40	-	-	-	B33-328-499	B30-R6000HF	300
▲	B-490	F H L	95.25	38.10	-	-	-	B33-158-490	B30-R4300	1000

*AW = All white / no transparent area

F Freezer environment N Liquid nitrogen environment A Autoclave environment H Hot water bath (100°C) S Self-laminating label L Low-profile (extremely thin) label R Removable

B-461, B-490, B-492 & B-499 Vial top labels

Identify the tops of your tubes with these circular labels, or use the combined vial and vial top labels

- B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen.



Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
0.5 mL										
	B-499	F A	22.86	12.70	12.70	-	-	B33-126-499	B30-R4300	1500
	B-490	F H L	22.86	12.70	12.70	-	-	B33-126-490	B30-R4300	2500
	B-499	F A	25.40	9.53	9.53	-	-	B33-163-499	B30-R4300	1500
	B-492	F H L	25.40	9.53	9.53	-	-	B33-163-492	B30-R6400	1500
	B-461	F A H S L	25.40	9.53	9.53	25.40	9.53	B33-606-461	B30-R4300	1000
	B-492	F H L	25.40	12.70	11.18	-	-	B33-182-492	B30-R6400	1500
1.5 mL										
	B-499	F A	-	-	9.53	-	-	B33-602-499	B30-R6000HF	3000
	B-499	F A	-	-	9.53	-	-	B33-602-499YL	B30-R6000HF	3000
	B-461	F A H L	-	-	9.53	-	-	B33-602-461AW	B30-R4300	3000
	B-499	F A	-	-	9.53	-	-	B33-143-499	B30-R4300	1500
	B-492	F H L	-	-	9.53	-	-	B33-143-492	B30-R6400	1500
2.0 mL										
	B-499	F A	-	-	12.70	-	-	B33-603-499	B30-R6000HF	3000
	B-499	F A	-	-	12.70	-	-	B33-603-499YL	B30-R6000HF	3000
	B-499	F A	-	-	12.70	-	-	B33-144-499	B30-R4300	1500
	B-492	F H L	-	-	12.70	-	-	B33-144-492	B30-R6400	1500
	B-490	F H L	-	-	12.70	-	-	B33-144-490	B30-R4300	2500
4.0 mL										
	B-492	F H L	41.28	15.24	9.53	-	-	B33-190-492	B30-R6400	1500
	B-461	F A H S L	41.28	15.24	12.70	41.28	15.24	B33-608-461	B30-R4300	1000
15.0 mL										
	B-461	F A H L	-	-	15.24	-	-	B33-604-461AW	B30-R4300	3000

* AW = All white / no transparent area

F Freezer environment N Liquid nitrogen environment A Autoclave environment H Hot water bath (100°C) S Self-laminating label L Low-profile (extremely thin) label R Removable

B-7425 Polypropylene labels

- Offers excellent all-purpose sample traceability
- Stays attached to vials, tubes, slides and well plates
- Remains legible when exposed to chemicals and extreme temperatures



Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
-										
▲	B-7425	F A H	50.80	12.70	-	-	-	B33-53-7425	B30-R4300	2000
0.5 - 0.7 ml										
⬢	B-7425	F A H	25.40	9.53	-	-	-	B33-152-7425	B30-R4300	2000
0.5 - 8.0 ml										
✖	B-7425	F A H	25.40	9.53	9.53	-	-	B33-249-7425	B30-R4300	1500
✖	B-7425	F A H	25.40	12.70	11.18	-	-	B33-251-7425	B30-R4300	1500
1.0 - 2.0 ml										
▲	B-7425	F A H	20.96	6.35	-	-	-	B33-257-7425	B30-R4300	1500
1.0 - 8.0 ml										
⬢	B-7425	F A H	25.40	19.05	-	-	-	B33-88-7425	B30-R4300	2000
▲	B-7425	F A H	38.10	44.45	-	-	-	B33-258-7425	B30-R4300	900
1.0 ml										
▲	B-7425	F A H	33.02	15.24	-	-	-	B33-256-7425	B30-R4300	1500
1.5 - 2.0 ml										
▲	B-7425	F A H	25.40	12.70	-	-	-	B33-59-7425	B30-R4300	2000
2.0 ml										
⬢	B-7425	F A H	38.10	12.70	-	-	-	B33-37-7425	B30-R4300	1500
15.0 ml										
▲	B-7425	F A H	38.10	25.40	-	-	-	B33-235-7425	B30-R4300	1250
50.0 ml										
▲	B-7425	F A H	25.40	25.40	-	-	-	B33-179-7425	B30-R4300	1500
▲	B-7425	F A H	38.10	19.05	-	-	-	B33-136-7425	B30-R4300	1500
▲	B-7425	F A H	50.80	6.35	-	-	-	B33-151-7425	B30-R4300	2000
▲	B-7425	F A H	50.80	25.40	-	-	-	B33-137-7425	B30-R4300	1500

B-7425-AC Sterilisation indicating labels

Label confirms successful sterilisation



Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
15.0 ml								
▲	B-7425		38.10	25.40	38.10	B33-235-7425-AC	B30-R4300	1250
50.0 ml								
▲	B-7425		50.80	25.40	50.80	B33-137-7425-AC	B30-R4300	1500

F Freezer environment N Liquid nitrogen environment A Autoclave environment H Hot water bath (100°C) S Self-laminating label L Low-profile (extremely thin) label R Removable

B-488 Well plate labels

Our well plate labels guarantee crystal clear text and barcoding for most laboratory environments

- Chemically-resistant polyester made to fit common well plate sizes



Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
⬢	B-488	F A	22.86	19.05	B33-616-488	B30-R4300	3000
⬢	B-488	F A	22.86	22.86	B33-617-488	B30-R4300	3000
▲	B-488	F A	48.26	6.35	B33-635-488	B30-R4300	2000

B-498 Re-Identify Tissue Cassettes Labels

Tissue cassettes are often re-identified when labs collect samples from various biorepositories. Typically, each laboratory has its own unique way of identifying samples, which creates a need to re-identify samples in a common way. The B-498 labels can be applied directly onto the cassettes, on pure paraffin wax and on top of another label or identifier.



Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
⬢	B-498	F R	19.05	6.35	B33-1-498	B30-R6200	5000
▲	B-498	F R	19.05	19.05	B33-254-498	B30-R6200	1000

B-481 & B-488 Slide labels

Designed to provide crisp and clear sample identification throughout the sample generation, inspection and storage process

- Resistant to xylene, alcohol and DMSO

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
▲	B-481	F H	22.86	9.53	B33-195-481	B30-R6400	3000
⬢	B-488	F A	22.86	19.05	B33-616-488	B30-R4300	3000
▲	B-481	F H	22.86	19.05	B33-194-481	B30-R6400	2000
⬢	B-488	F A	22.86	22.86	B33-617-488	B30-R4300	3000
▲	B-481	F H	22.86	22.86	B33-141-481	B30-R6400	1500
▲	B-488	F A	48.26	6.35	B33-635-488	B30-R4300	2000

F Freezer environment N Liquid nitrogen environment A Autoclave environment H Hot water bath (100°C) S Self-laminating label L Low-profile (extremely thin) label R Removable

B-427 Straw labelling

These self-laminating labels protect the printed information for lasting identification



Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
0.3 mL									
	B-427	F N S	25.40	25.40	25.40	9.53	B33-116-427	B30-R4300	2500
	B-427	F N S	25.40	25.40	25.40	9.65	B33-211-427	B30-R4300	3000
	B-427	F N S	25.40	31.75	25.40	12.70	B33-117-427	B30-R4300	2000
	B-427	F N S	44.45	38.10	44.45	12.70	B33-121-427	B30-R4300	1000
0.5 mL									
	B-427	F N S	25.40	63.50	25.40	19.05	B33-511-427	B30-R4300	1500

B-488 Bottles, flasks, dishes and general identification

Used to identify a variety of common laboratory glassware items and other consumables



Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
	B-488	F A	22.86	19.05	B33-616-488	B30-R4300	3000
	B-488	F A	22.86	22.86	B33-617-488	B30-R4300	3000
	B-488	F A	48.26	6.35	B33-635-488	B30-R4300	2000

B-403 Water dissolvable label

The label dissolves within 30 seconds exposure to water



Diagram	Material	Special Properties	Label Width A (mm)	Label Length B (m)	Order Reference	Printer Ribbon Series	Labels per Roll
	B-403	R	28.58	30.48	B30C-1125-403-WT	B30-R4300	1
	B-403	R	57.15	30.48	B30C-2250-403-WT	B30-R4300	1
	B-403	R	76.20	30.48	B30C-3000-403-WT	B30-R4300	1
	B-403	R	101.60	30.48	B30C-4000-403-WT	B30-R4300	1

F Freezer environment N Liquid nitrogen environment A Autoclave environment H Hot water bath (100°C) S Self-laminating label L Low-profile (extremely thin) label R Removable

This section provides a quick reference to Brady materials listed throughout this catalogue, including basic attributes, applications and regulatory compliance where applicable. For more detailed material attribute and performance information, please refer to the material's Technical Data Sheet, listed at www.bradyeurope.com/tds.

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days) Min.	Max.	Properties & Applications	Approval/Compliance
B-342	Heat-shrink Polyolefin	Matt	White	-55 °C	130.6 °C	3:1 ratio heat shrinkable wire marking sleeve that fits snugly around wires for identification and protection. Fade-resistant and flame retardant. Also available in yellow and black.	UL Recognised to UL224; SAE-AMS-DTL-23053/5 C (Class 1); SAE AS-81531
B-345	High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve	Matt	White	-70 °C	130.6 °C	2:1 ratio heat shrinkable wire marking sleeve specifically designed for high temperature and low vacuum outgassing applications. These heat shrinkable wire marking sleeves are made from irradiated high temperature PVDF. Also available in black.	NASA SP-R-0022A Outgassing Performance; SAE-AMS-DTL-23053/18 (Class 2); SAE AS-81531; MIL-STD-202G Method 215K
B-348	Polyolefin	Matt	White	-55 °C	135 °C	Mass Transit Tag complies with minimal smoke and halogen emission requirements of the most strict underground norms for mass transit vehicles. The tag is a practical solution for mass transit manufacturers to identify thick cables and cable bundles.	–
B-403	Paper	Matt	Black on White	-70 °C	100 °C	White dissolvable paper. Dissolves completely in water leaving no adhesive residue, ideal for temporary labelling applications	–
B-413	Metallic, Non-metal Polyester	Satin	Light Grey	-70 °C	110 °C	Thermal transfer printable polyester material with metallic-looking finish (non-metallised). Ideal for barcoded asset tracking and rating plate applications.	UL Recognised; cUL Recognised
B-417	Self-laminating Vinyl	Matt	White, Transparent	-40 °C	70 °C	Keep your wire identification secure with this self-laminating marker with extra-strong adhesive. The extra-strong adhesive makes these markers ideal for small-diameter wires. Features a white printable area and a clear tail that wraps around the marker.	UL Recognised to UL969 Labelling and Marking Standard when printed with the Brady Series R4300 and R7950 ribbons. See UL files MH62024 for specific details. Brady customers should specify at purchase if they require UL Recognised B-417 labels. Brady sells both UL Recognised B-417 labels and non-approved labels depending on customer requirements
B-422	Polyester	Gloss	White	-40 °C	100 °C	White material stock with glossy finish and 2 mils of adhesive for rough surface applications, including low surface energy plastics. Designed to withstand solvent exposure. UL rated for surfaces commonly used in solar panel manufacturing. Also used for component identification, barcoding, asset and inventory tracking.	UL Recognised; CSA Accepted
B-423	Polyester	Gloss	White	-70 °C	110 °C	White polyester thermal transfer printable material with a glossy finish. Widely used for component identification, barcoding, asset and inventory tracking. UL rated for surfaces commonly used in solar panel manufacturing.	UL Recognised; CSA Accepted; Halogen Free (DIN VDE 0472/part 815) Approvals are for White material only
B-424	Paper	Matt	White	-40 °C	50 °C	White paper material with matt finish and smooth top coat finish for thermal transfer printing. Good contrast and smear resistance for thermal barcode printing. Used for general purpose labeling applications	–
B-425A	Polypropylene	Matt	White	-70 °C	80 °C	White polypropylene material stock with matt finish for thermal transfer printing or write-on applications. Excellent solvent resistance and print performance; not recommended for long-term outdoor use.	UL Recognised; CSA Accepted; Halogen Free (DIN VDE 0472/part 815)

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days) Min.	Max.	Properties & Applications	Approval/Compliance
B-427	Self-laminating Vinyl	Matt	White, Transparent	-40 °C	60 °C	Thermal transfer printable, self-laminating material. These labels have a printable area with a clear "tail" that wraps around the marker. The "tail" serves as overlaminate to protect the print. Superior resistance to abrasion, solvents, water, oil and dirt. Also available in grey, brown, green, yellow, blue, red, purple, orange.	UL Recognised to UL969 Labelling and Marking Standard when printed with the Brady Series R4300 and R6200 ribbons. See UL files MH17154 for specific details. Brady customers should specify at purchase if they require UL Recognised B-427 labels. Brady sells both UL Recognised B-427 labels and non-approved labels depending on customer requirements.
B-428	Metallised Polyester	Matt	Light Grey	-70 °C	120 °C	Thermal transfer printable metallised polyester with matt finish. Withstands solvents and variable temperatures. Excellent for serial and rating plate applications with name-plate quality and a metal-looking finish.	UL Recognised; CSA Accepted; AGA Approved; Halogen Free (DIN VDE 0472/part 815)
B-428/B-966B	Metallised Polyester with Polyester Overlaminate	Gloss	Silver	-70 °C	120 °C	A Metallised polyester label that comes with a separate overlaminate to be applied over the label once printed. This way the label remains clear and easy-to-read, even in harsh environments. Overlaminate is a clear polyester (B-966B) that extends outside of label on each side when applied.	–
B-430	Polyester	Gloss	Transparent	-70 °C	100 °C	Translucent, high performance polyester material with a glossy finish. Thermal transfer printable.	UL Recognised; CSA Accepted
B-432	Polyester	Gloss	Transparent	-40 °C	100 °C	Translucent, high performance polyester material with a glossy finish. Thermal transfer printable. Very similar to B-430, but has a thicker layer of acrylic adhesive for better adherence to rough surface applications.	UL Recognised; CSA Accepted
B-434A	Metallised Polyester	Gloss	Silver	-40 °C	90 °C	Metallised polyester with a glossy finish and a thicker layer of adhesive for better adherence to rough surface applications. Withstands numerous solvents while maintaining excellent image quality.	UL Recognised; CSA Accepted
B-435A	Metallised Polyester	Gloss	Silver	-40 °C	90 °C	Printable metallised polyester withstands numerous solvents and variable temperatures. Ideal for serial and rating plate applications with name-plate quality and a metal looking finish.	UL Recognised; CSA Accepted
B-437	Polyvinylfluoride	Matt	White	-70 °C	135 °C	Polyvinylfluoride label material with matt finish. Used in wire and cable identification applications where self-extinguishing features are required. This label material utilises an adhesive for heavy-duty applications and is available in continuous or die-cut formats. Excellent resistance to water, oil and other common fluids. Also available in yellow.	MIL-M-87958 Pressure Sensitive Adhesive Wire or Cable Marker and Identification specification
B-438	Tamper-evident Metallised Polyester	Matt	Silver	-40 °C	40 °C	Metallised polyester material with matt finish. Leaves a checkerboard footprint on the surface when removed; the pattern also appears on the top of the label to prevent it from being reused.	UL Recognised; CSA Accepted
B-439	Vinyl	Gloss	Green	-70 °C	40 °C	Available in Blue, Green, Orange, Red, White and Yellow	–
B-461	Self-laminating Polyester	Matt	White, Transparent	-196 °C	110 °C	Permanent adhesive; suitable for liquid nitrogen application if material is wrapped around itself, as in self-lamination; write-on capabilities. Temperature range increases to 121°C when used in autoclave process	–
B-472	Polyimide	Matt	White	-70 °C	100 °C	Cable and wire bundle applications and label applications where self-extinguishing properties are required	–
B-480A	Metallic, Non-metal Polyester	Satin	Silver	-70 °C	110 °C	Thermal transfer printable polyester material with metallic-looking finish (non-metallised) and aggressive adhesive for powder coats or rough surface applications. Ideal for barcoded asset tracking and rating plate applications.	UL Recognised; cUL Recognised

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days) Min.	Max.	Properties & Applications	Approval/Compliance
B-481	StainerBondz™ Polyester	Matt	White	-80 °C	130 °C	White polyester will remain resistant when exposed to xylene and other chemicals that are commonly used in the slide staining process	–
B-482	Polyester	Matt	White			The B-482 label material, combined with Brady's R6400 ribbon, provides the durability and print quality that histology and anatomic pathology labs need for accurate, identifiable specimen labelling. Paraffin and solvent resistant.	–
B-483A	Polyester	Gloss	White	-40 °C	120 °C	White polyester thermal transfer printable material with glossy finish and aggressive adhesive specifically designed for powder coated surfaces.	UL Recognised; CSA Accepted
B-484A	Polyester	Gloss	White	-40 °C	120 °C	White polyester thermal transfer printable material, similar to B-483, but with thinner construction for curved or angled surfaces. Offers aggressive adhesive for adhesion to textured metals and low surface energy plastics.	UL Recognised
B-486B	Metallised Polyester	Matt	Light Grey	-40 °C	120 °C	Thermal transfer printable metallised polyester material. Designed for high adhesion to textured metals, powder coated surfaces and low surface energy plastics.	UL Recognised; CSA Accepted
B-488	Polyester	Matt	White	-40 °C	145 °C	White polyester thermal transfer printable material, similar to B-423, but with matt finish. Widely used for component identification, barcoding, asset and inventory tracking.	–
B-489A	Polyester	Matt	White	-40 °C	120 °C	White polyester thermal transfer printable material, similar to B-483, but with matt finish. Agressive adhesive specifically designed for powder coated surfaces.	UL Recognised; CSA Accepted
B-490	FreezerBondz™ Polyester	Matt	White	-196 °C	130 °C	Can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen, except for Vial Tops. Material must slightly overlap itself.	–
B-492	FreezerBondz™ Polyester	Matt	White	-196 °C	110 °C	Ultra thin; can label frosted/frozen (with overlap) or room temperature labels and lasts in liquid nitrogen and hot water baths	–
B-498	Vinyl Cloth	Semi-gloss	White	-40 °C	80 °C	White vinyl cloth label material with glossy finish. The adhesive and cloth backing give excellent holding power, while being repositionable and removing cleanly.	UL Recognised
B-499	Nylon Cloth	Matt	Black on White	-40 °C	90 °C	Nylon cloth material with matt finish. The adhesive allows labelling in environments with heat, cold, oil and dirt. Also available in yellow.	UL Recognised; CSA Accepted; Halogen Free (DIN VDE 0472/part 815) Approvals are for White material only
B-509	Magnetic Polyester	Matt	White	-18 °C	70 °C	Magnetic Back Polyester is used for temporary, reusable and movable signs	–
B-526	Phosphorescent Polyester	Gloss	Photoluminescent Green	-40 °C	60 °C	BradyGlo™ High Intensity laminate is designed to provide high adhesion and luminance for egress marking in low light areas in and along stairwells of public buildings, exit and directional signs, identification of fire alarms and extinguishers, low location egress pathway markings, and directional systems for escape or evacuation routes.	New York Local Law 26 RS 6-1 & 6-1A; City of New York, Department of Buildings MEA No. 467-06-M UV: 46-9-7
B-549	Polyester	Gloss	White	-40 °C	100 °C	Flexible, dimensionally stable, low temperature, pressure sensitive adhesive tape for permanent application. Adhesive can be applied at temperatures down to -10°F (-23°C).	–
B-551	Polyester	Matt	White	-40 °C	89 °C	Tag material used for marking on-the-spot warning of dangerous conditions	Complies to OSHA 1910.145(f) when printed with required signal word and major message.
B-565	Metallised Polyester	Matt	Silver	-40 °C	110 °C	Designed for applications like identification labels or rating and serial plates that utilise barcodes, alphanumerics, graphic symbols and logos and require nameplate-like quality	–
B-569	Polyester	Gloss	Green	-40 °C	100 °C	Designed for use on stainless steel pipes in harsh environments such as the Pulp and Paper Industry	–

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days) Min.	Max.	Properties & Applications	Approval/Compliance
B-581	Vinyl	Gloss	White	-40 °C	82 °C	Only indoor use, where frequent repositioning is required	–
B-584	Reflective Tape	Gloss	Orange	-40 °C	70 °C	Suitable for outdoor use. Also available in silver and yellow.	–
B-593	Polyester	Gloss	White	-20 °C	100 °C	EPREP (Engraved Panel REPlacement labels) are designed for patch panel identification in identifying external push-buttons, switches and internal connection points. Also available in black, green, red, silver and yellow.	UL Recognised; cUL Recognised
B-595	Vinyl	Gloss	White	-40 °C	82 °C	Durable, low-shrink vinyl with our most aggressive adhesive. Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces). Adheres to "difficult" low-surface energy items (PVC piping, blow-moulded equipment cases, ABS plastics, recycled plastics). Available in a wide range of colours.	BS 5609:1986 Section 2 and section 3
B-618	Polyester	Matt	White	-70 °C	120 °C	Ideal for rating plate applications and general-purpose labeling with high-quality barcodes and graphics. Film contains recycled PET.	UL Recognised; cUL Recognised
B-719	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals. Surface resistivity values in the recommended range for dissipative ESD packing materials.	UL Recognised; ANSI/ESD S541-2008 (between 10^4 and 10^{11} ohms) for dissipative ESD packaging materials; MIL-STD-202G Method 215K
B-724	Polyimide	Matt	Amber	-70 °C	300 °C	Amber polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	MIL-STD-202G, Notice 12, Method 215K; SAE AS81531 Marking of Electrical Insulating Material
B-728	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	UL Recognised; MIL-STD-202G, Notice 12, Method 215K
B-729	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material, low profile (1 mil thickness), with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	UL Recognised; MIL-STD-202G, Notice 12, Method 215K
B-7425	Polypropylene	Matt	Black on White	-80 °C	70 °C	White Polypropylene material. Ideal for laboratory identification such as vials, centrifuge tubes and test tubes. For freezer or liquid nitrogen applications, B-7425 must be applied prior to being frozen.	–
B-7563	Metallised Polyester	Satin	Silver	-40 °C	135 °C	Thermal transfer printable metallised polyester withstands numerous solvents and variable temperatures. Ideal for serial and rating plate applications with name-plate quality and a metal looking finish.	UL Recognised
B-7569	Vinyl	Gloss	White	-20 °C	75 °C	Used for Pipe Markers, Arrow Tape, Warehouse Marking, Floor Marking, Warning Panels, Safety Signs and Hazardous Substance Identification. Available in a wide range of colours.	BS 5609:1986 Section 2 and section 3
B-7597	Polyethylene	Matt	White	-40 °C	100 °C	Polyethylene tag material. Resists tearing and the topcoat resists smudging and abrasion. Halogen free material.	Halogen Free (DIN VDE 0472/part 815)
B-7598	Polyester	Gloss	White, Yellow, Red, Green, Silver, Black, Blue	-40 °C	100 °C	A general identification polyester tag for cables exposed to extreme conditions. Up to 10 years outdoor durability. Also available in black, blue, green, red, silver and yellow.	Parts supplied in White, Black or Silver are Halogen Free as per IEC 61249-2-21 (2003-11)

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days) Min.	Max.	Properties & Applications	Approval/Compliance
B-7599	Polyethylene	Matt	Yellow	-40 °C	50 °C	White polyethylene tag material. Rapido™ Wiremarking Sleeves are fast and easy to apply. Simply squeeze the edges of the material together, thread your wire through the holes and pull away the wire to release the marker.	–
B-7641	Heat-shrink Polyolefin	Matt	White	-55 °C	105 °C	2:1 ratio heat shrinkable, zero halogen wire marking sleeves. The wire marking sleeves offer outstanding fire safety properties and minimal smoke emission. Also available in yellow.	BS-6853 (1999) Vehicle Category 1A; EN-45545-2, requirement 24, Vehicle Category HL3; Zero Halogen
B-7642	Heat-shrink Polyolefin	Matt	White	-40 °C	120 °C	2:1 ratio heat shrinkable wire marking sleeves. The sleeves are high-temperature rated, highly flame retardant, and very flexible.	–
B-7643	Thermoplastic Polyether Polyurethane	Matt	White, Yellow	-40 °C	90 °C	Thermal transfer and dot matrix printable wire and cable bundle tag for harsh environments. Low halogen material. Also available in black, orange, red and yellow.	Halogen free per IEC 61249-2-21 (2003-11); Adherence: SAE-AS81531-1998; Flame retardant: MIL-STD-202G
B-767	Static Dissipative Polyimide	Gloss	White	-80 °C	300 °C	The high perfomance B-767 material is ideal for PCB and electronic component manufacturing, this material is static dissipative and survive extreme processes like wave soldering and multiple harsh washes.	UL Recognised; ANSI/ESD S541-2008 (between 10^4 and 10^{11} ohms) for dissipative ESD packaging materials; MIL-STD-202G Method 215K
B-768	Static Dissipative Polyimide	Gloss	White	-80 °C	300 °C	The high perfomance B-768 material is ideal for PCB and electronic component manufacturing, this material is static dissipative and survive extreme processes like wave soldering and multiple harsh washes.	UL Recognised; ANSI/ESD S541-2008 (between 10^4 and 10^{11} ohms) for dissipative ESD packaging materials; MIL-STD-202G Method 215K
B-7696	Vinyl	Gloss	White, Yellow	-40 °C	70 °C	Brady DuraSleeve® printable inserts create a durable legend. The rigid construction of the DuraSleeve wire marking system provides inserts that can easily be inserted into a clean carrier. The legend can be changed before or after termination. Also available in yellow.	UL94 V0
B-777	Polyimide	Gloss	White	-70 °C	300 °C	The B-777 Ultratemp label for harsh washing processes works seamlessly with the BSP™61 Print and Apply System, the ALF Label Feeder and other auto-apply systems. Together they provide a reliable and flexible on-site traceability solution for high heat applications in manufacturing.	UL Recognised to UL969 Labelling and Marking Standard when printed with Brady Series R6300 ribbon. See UL file MH25991 for specific details.
B-787	Polyvinylfluoride	Gloss	White	-70 °C	100 °C	White polyvinyl fluoride material. Used in wire and cable identification applications where self-extinguishing properties are required.	Boeing BMS 10-26 Type I, Grade AMeets the colour requirements of FED-STD-595C Colour 17875 White
B-797	Polyimide	Gloss	White	-70 °C	300 °C	B-797 is a high perfomance material for PCB and electronic component manufacturing, that is engineered to survive extreme processes like wave soldering and multiple harsh washes.	UL Recognised; MIL-STD-202G, Notice 12, Method 215K; Dibutyltin and Dioctyltin free
B-8423	Polyester	Satin	White	-70 °C	110 °C	Polyester material with satin finish, economical alternative to B-423. Used for component identification, barcoding, asset and inventory tracking. Also available in yellow.	–
B-854	Metal Detectable Polyester	Matt	White	-40 °C	110 °C	Tough against harsh washdown environments; metal detectable. Also available in yellow.	–
B-855	Polyester	Matt	White	-40 °C	110 °C	Tough against harsh washdown environments. Also available in yellow.	–
B-8591	Polymer	Gloss	White	-70 °C	110 °C	B-8591 toughest outdoor label is suited for smooth, textured/rough or highly textured/low energy surfaces.	–

Need more information? View the technical data sheets Brady offers online access to technical data sheets for all Brady materials. View by a specific B-Number or search by relevant keywords. Visit **www.bradyeurope.com/tds** or click the QR code.

Brady Workstation

Brady Workstation offers professional, intuitive apps to design quality product and cable labels and safety signs. Label design becomes easier, faster and quickly adaptable to new label norms thanks to centralised updates.

Select the apps you need

Simply select the apps you need, download the 30-day trial and purchase when satisfied. Available product, cable, safety and facility identification apps enable you to:

- design and edit custom labels and signs
- design label templates and lock elements for consistency
- create text-only cable labels
- automate label creation
- easily import data
- easily set up complex label sequences
- easily design CLP-chemical labels
- print lockout procedures, tags and energy source labels
- design safety and facility signs.

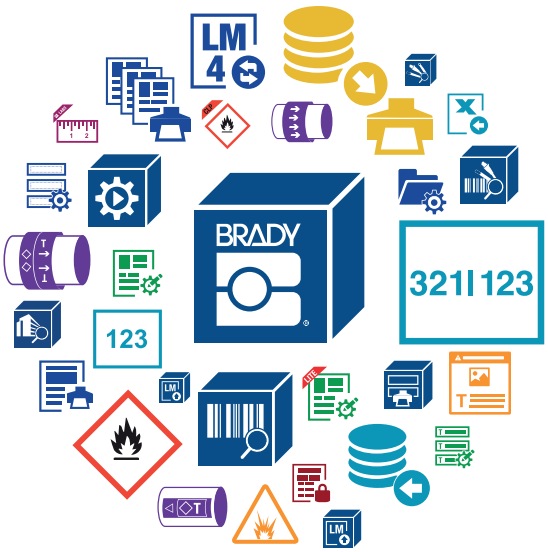

Available in multiple languages

Brady Workstation apps are available in more than 20 languages, including English, French, German, Russian, Spanish, Italian, Polish and Dutch. Select your language before downloading from the drop down menu.

Easily connect to your printer

Brady Workstation works seamlessly with a range of Brady desktop and portable printers. Brady's high-end label printers also offer bi-directional communication with Brady Workstation and will inform users if they have to switch label materials to print specific label designs. Printer compatibility is shown in Brady Workstation on an app by app basis.

Brady Workstation Basic Design Software Suite

Get everyone in your facility up and running quickly on as many computers as you like with this free label creation software! You'll have basic design, formatting, graphics and simple barcode libraries to create labels like a pro!

The Basic Suite is included with every printer, all you need to do is download it.
Workstation.BradyID.com/Free

Brady Workstation Product and Wire Identification Software Suite

Quickly identify your products and wires with customised text or graphical labels, using serialised or imported data.
Workstation.BradyID.com/ProductandWire

Brady Workstation Safety and Facility Identification Software Suite

Keep your facility safe and compliant by creating custom signs, label and pipemarkers, adding visual safety guidance. Workstation.BradyID.com/SafetyAndFacilityE

Brady Workstation Laboratory Identification Software Suite

Easily identify any sample with the most wanted laboratory sample label design apps in our Brady Workstation Lab suite.
Workstation.BradyID.com/lab

PRINTER	
Description	BradyPrinter i3300 Industrial Label Printer
Includes	This i3300 printer comes in a cardboard box. It ships with a power cord, a Brady Workstation Suite, a USB cable, a product CD holding the manual, a cleaning kit and a printed quick start guide
Applications	Asset tracking, Barcode labelling, Circuit board labelling, Component and equipment labelling, Data and telecommunications labelling, Electrical labelling, Facility identification, General identification, Hazard communication identification, Inventory and inspection labelling, Laboratory labelling, Lean and 5S labelling, Pipe and valve marking, Warehouse marking, Wire and cable labelling
Print Resolution (dpi)	300 dpi
Print Speed (mm/sec)	101.60 mm/s
Stand-alone Printing (Detached from PC)	Peripheral
Internal Memory	512 MB RAM, 195 MB IFFS Flash
Colour Capability	Monocolour
Language Support	Bulgarian, Chinese (Simplified), Chinese (Traditional), Croatian, Czech, Danish, Dutch, English (US), Estonian, Finnish, French (Canada), French, German, Hungarian, Italian, Korean, Norwegian (Bokmål), Polish, Portuguese (Brazil), Portuguese, Romanian, Russian, Spanish (Mexico), Spanish, Swedish, Thai, Turkish
Weight (kg)	5.22 kg
Width x Height x Depth (mm)	228.60 x 241.30 x 304.80
Calibration	No
Operating Temperature	10°C - 40°C
Operating Humidity	10%-85% (RH non-condensing)
Storage Temperature	-20° - 50°C
Storage Humidity	15%-90% (RH non-condensing)
Warranty	1 year
MEDIA	
Continuous vs Die-cut Labels	Continuous and Die-cut
Compatible Media	B30-, B30C-, B30EP-, B33-, B33C-, B33D-, B33FP-, B33FT-, B33R-
Custom Labels	Yes
Number of Stock Parts	800+ standard parts
Materials Supported	Freezerbondz Polyester; Heat-shrink Polyolefin Sleeve; High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve; Magnetic Polyester; Metal Detectable Polyester; Metallic, Non-metal Polyester; Metallised Polyester; Nylon Cloth; Paper; Phosphorescent Polyester; Polyester; Polyester Tag; Polyester with Polyester Overlaminate; Polyethylene Tag; Polyimide; Polyolefin; Polypropylene; Polyvinylfluoride; Reflective Tape; Self-laminating Polyester; Self-laminating Vinyl; StainerBondz Polyester; Tamper-evident Metallised Polyester; Thermoplastic Polyether Polyurethane; Vinyl; Vinyl Cloth
Max. Label Width (mm)	107.95
Min. Label Height (mm)	6.35
Min. Label Width (mm)	6.35
Max. Liner Width (mm)	107.95
Min. Liner Width (mm)	18.03
Max. Print Width (mm)	101.98
Recommended Usage per Day	3000

POWER SUPPLY	
Power Supply	AC Adaptor
Power Supply Voltage	100 - 240 V @ 50 - 60 Hz
DISPLAY	
Display	Colour LCD Touchscreen
Display Resolution	320 x 240 pixels
On Screen Indicators	Supply Remaining, Ribbon Remaining, Ribbon and label part number recognition, WiFi, Ethernet Status, Error Messaging, Data Reception
SOFTWARE & CONNECTIVITY	
Connectivity Options	Ethernet, USB, USB 2.0, Wi-Fi
Software Compatibility	Brady Workstation, Windows based driver for 3rd party software use
Programming Language	BPL (Brady Programming Language)
FONTS/GRAPHICS/SYMBOLOGIES	
Built-in Fonts	Arial, Courier New, Times New Roman, Trechuchet MS, Verdana, Tahoma
Bar Code Type	Code 128A, Code 128B, Code 128C, Code 39, Code 93, EAN-13, EAN-8, HIBC, Interleaved 2 of 5, Interleaved 2 of 5 with check digit, JAN-13, JAN-8, UPC-A, Aztec, Data Matrix, MicroPDF417, PDF417, QR code
COMPLIANCE	
Approval/Compliance	UL; cUL; CE; RoHS; RCM; KCC; EAC

Learn more about the BradyPrinter i3300 on :
www.bradyeurope.com/i3300

Africa
Randburg, South Africa
Tel.: +27 11 704 3295
Email: africa@bradycorp.com

Benelux
Zele, Belgium
Tel.: +32 (0) 52 45 78 11
Email: benelux@bradycorp.com

Central & Eastern Europe
Bratislava, Slovakia
Tel.: +421 2 3300 4800
Email: central_europe@bradycorp.com

Denmark
Odense
Tel.: +45 66 14 44 00
Email: denmark@bradycorp.com

France
Roncq
Tel.: +33 (0) 3 20 76 94 48
Email: france@bradycorp.com

Germany, Austria & Switzerland
Egelsbach, Germany
Tel.: +49 (0) 6103 7598 660
Email: germany@bradycorp.com

Hungary
Budaörs
Tel.: +36 23 500 275
Email: central_europe@bradycorp.com

Italy
Gorgonzola
Tel.: +39 02 26 00 00 22
Email: italy@bradycorp.com

Middle East FZE
Dubai, UAE
Tel.: +971 4881 2524
Email: cs_me@bradycorp.com

Norway
Kjeller
Tel.: +47 70 13 40 00
Email: norway@bradycorp.com

Spain & Portugal
Madrid, Spain
Tel.: +34 900 902 993
Email: spain@bradycorp.com,
portugal@bradycorp.com

Sweden, Finland, Baltic states
Kista, Sweden
Tel.: +46 (0) 8 590 057 30
Email: sweden@bradyeurope.com

Turkey
Istanbul
Tel.: +90 212 264 02 20 / 264 02 21
Email: turkey@bradycorp.com

UK & Ireland
Banbury, UK
Tel.: +44 (0) 1295 228 288
Email: uk@bradycorp.com

Our mission is to identify and protect people, products and premises

To help minimise our impact on the environment, Brady limits its number of reprints.

Updated versions are always available for download on www.bradyeurope.com.

Search for: EUR-M-055-EN

Y4822185

Your distributor

15-02-2024

© 2024 Brady Worldwide Inc. ALL RIGHTS RESERVED.